

# **ASAHI**

## **ALUMINUM SERIES**

### **BEARING UNITS**



JP-1973



ISO 9001  
JQA-1973

**NEW**



***Ideal for Food Processing Machinery, Packaging Machinery,  
Medical Equipment, Textile Machinery***

**ASAHI SEIKO CO., LTD.**

## 1. INTRODUCTION


This is a new series of light-weighted self-aligning bearing units consisting of stainless steel bearing inserts mounted in aluminum-alloy housings.

A combination of stainless steel bearing and aluminum housing offers an excellent corrosion-resistance, beautiful appearance, and hygienic machine design.

For added safety and protection against dust, bearing units fitted with pressed steel covers are also available.

## 2. CONSTRUCTION

The construction of new series is identical to our standard bearing units, which provide self-alignment, sealing and regreasable systems.

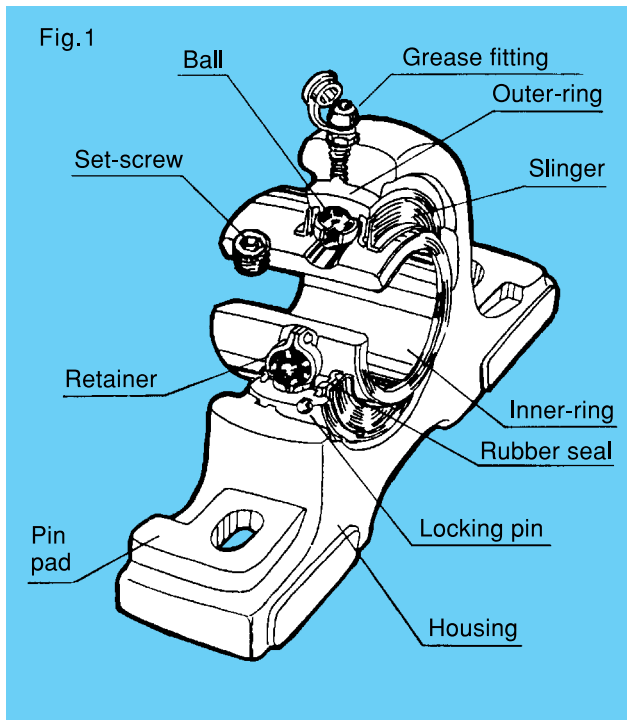

## 4. MATERIAL

Table 1

Bearing <b>MUC200</b>	
Ring	Stainless steel - <b>SUS440C EQ.</b>
Ball	Stainless steel - <b>SUS440C</b>
Retainer Set screw Slinger Locking pin	Stainless steel - <b>SUS304</b>
Seal	N B R
Housing <b>AP200, AF200, AFL200</b>	
Body	Aluminum alloy - <b>AC</b>
Grease fitting	Free-cutting brass - <b>C3604B</b>
Cover	Stainless steel - <b>SUS304</b>
Seal	N B R

## 5. NUMBERING SYSTEM

### MUCAP205E

- With rubber-sealed open-end cover and closed-end cover
- Bearing bore diameter number (25mm bore)
- Outside diameter series (Series 2)
- Aluminum-alloy housing style (Pillow block)
- Stainless steel bearing

## 3. FEATURES

- 1) Excellent corrosion-resistance  
Both stainless steel bearing and aluminum-alloy housing offer a very strong resistance against corrosion, water and chemicals.
- 2) Light-weight  
While the new series weighs only 1/2 of the corresponding cast iron housed units, it is as good as standard units in terms of static breaking strength in every direction.
- 3) Perfectly interchangeable with JIS standard bearing units.

Table 2

Hsg. style	Bearing	Housing	Stainless steel cover		Unit No.
			Open-end	Closed-end	
Pillow block	MUC200	AP200	—	—	MUCAP200
		AP200C	200CPS20	—	MUCAP200C
		AP200C	200CPS20	200CPES20	MUCAP200E
Square flange	MUC200	AF200	—	—	MUCAF200
		AF200C	200CPS20	—	MUCAF200C
		AF200C	—	200CPES20	MUCAF200E
2-bolt flange	MUC200	AFL200	—	—	MUCAFL200
		AFL200C	200CPS20	—	MUCAFL200C
		AFL200C	—	200CPES20	MUCAFL200E

## 6. CORROSION-RESISTANCE

Table 3

◎ Excellent ○ Good △ Fair ▲ Bad × Very bad

Series	Material		Environmental conditions						
			Dry	Humid	Fresh water	Salt water	Nitric acid	Sulfuric acid	Hydrochloric acid
<b>MUCAP</b>	Stainless steel	SUS440C	○	△	△	▲	▲	×	×
	Stainless steel	SUS304	◎	◎	◎	○	◎	○	△
	Aluminum-alloy	AC	◎	◎	◎	○	▲	△	▲
<b>UCP</b> (reference)	High carbon chromium bearing steel	SUJ2	△	▲	▲	×	×	×	×
	Gray cast iron	FC200	△	×	×	×	×	×	×

## 7. TOLERANCE

Table 4

Unit :  $\mu\text{m}$

Inner ring					Housing					
Bearing No. <b>MUC</b>	Mean bore diameter in a radial plane $\Delta\text{dmp}$		Bore diameter deviation in a radial plane $\text{Vdp}$	Width deviation $\Delta\text{Bs}$ (reference)		Radial run-out $\text{Kia}$ (reference) Max.	Housing No. <b>AP, AF, AFL</b>	Base-to-center-height deviation		Tolerance for the distance between mounting-bolt-hole centers
	High	Low		High	Low			Pillow block type $\Delta\text{Hs}$	Flange type $\Delta\text{As}$	
	<b>204~206</b>	+18	0	12	0	-120		18	<b>204~208</b>	
<b>207~208</b>	+21	0	14	0	-120	20				

## 8. RECOMMENDED TIGHTENING TORQUE FOR SET-SCREWS AND MOUNTING BOLTS

Table 5

Bearing			Housing				
Bearing No. <b>MUC</b>	Hex. wrench key size	Recommended tightening torque for set-screw (N·m)	Housing No. <b>AP, AF, AFL</b>	Mounting bolt size			Recommended tightening torque for bolts (N·m)
				AP	AF	AFL	
<b>204</b>	3	3.9	<b>204</b>	<b>M10</b>	<b>M10</b>	<b>M10</b>	17.7
<b>205</b>							24.5
<b>206</b>				29.4			
<b>207</b>	4	8.3	<b>207</b>	<b>M14</b>	<b>M12</b>	<b>M14</b>	35.3
<b>208</b>							45.1


## 9. STATIC BREAKING STRENGTH OF HOUSINGS

Table 6

Unit : kN

Housing No. <b>AP</b> <b>AF</b> <b>AFL</b>							
	$W_u$	$W_s$	$W_t$	$W_d$	$W_t$	$W_d$	$W_t$
<b>204</b>	32.5	51.5	14	24	29	30.5	26.5
<b>205</b>	38	56.5	16	26	35	42	29
<b>206</b>	42	61.5	17.5	28.5	35.5	52.5	32.5
<b>207</b>	48	72	21	31.5	44	64.5	37.5
<b>208</b>	53.5	82	22.5	34	49	75.5	42.5

## 10. ALLOWABLE SPEED

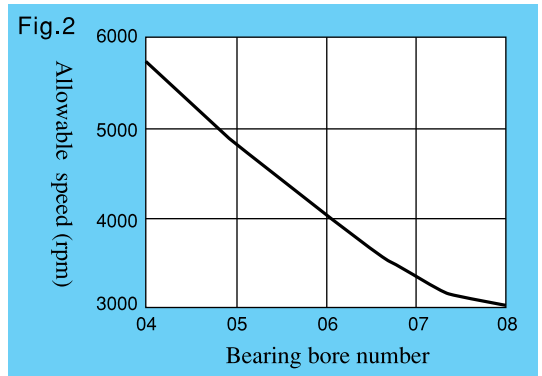

## 11. OPERATING TEMPERATURE RANGE

Standard (w/o covers)  $-20 \sim +80^\circ\text{C}$   
 With covers  $-20 \sim +60^\circ\text{C}$

## 12. DEMENSION TABLES PILLOW BLOCKS MUCAP 200


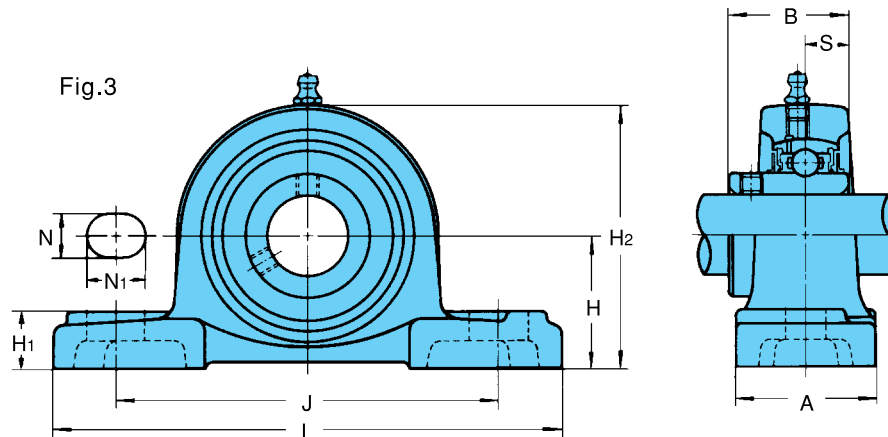


Table 7

Shaft dia. (mm)	Unit No.	Dimensions (mm)												Mounting bolt size
		H	L	J	A	N	N1	H1	H2	B	S	C1	Zs	
20	<b>MUCAP204</b>	33.3	127	95	38	13	19	15	65	31	12.7	8	56	M10
25	<b>MUCAP205</b>	36.5	140	105	38	13	16	16	70	34.1	14.3	11	63	M10
30	<b>MUCAP206</b>	42.9	165	121	48	17	21	18	83	38.1	15.9	9	65	M14
35	<b>MUCAP207</b>	47.6	167	127	48	17	21	19	94	42.9	17.5	8	70	M14
40	<b>MUCAP208</b>	49.2	184	137	54	17	25	19	100	49.2	19	10	82	M14

## PILLOW BLOCKS FITTED WITH STAINLESS STEEL COVERS MUCAP 200C MUCAP 200E

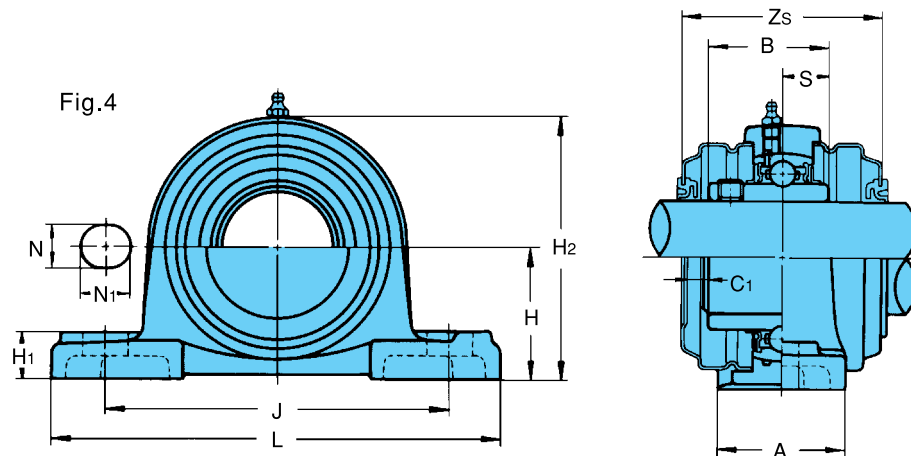

Bearing No.	Bearing		Housing No.		Unit No. with covers	Mass (kg)	
	Basic load rating (kN) [1kgf=9.8N]		Standard	With cover groove	With two rubber sealed open covers (one open cover & one closed cover)	Standard	With covers
	Cr	Cor					
<b>MUC 204</b>	10.9	5.3	<b>AP204</b>	<b>AP204C</b>	<b>MUCAP204C (E)</b>	0.34	0.36
<b>MUC 205</b>	11.9	6.3	<b>AP205</b>	<b>AP205C</b>	<b>MUCAP205C (E)</b>	0.41	0.43
<b>MUC 206</b>	16.7	9	<b>AP206</b>	<b>AP206C</b>	<b>MUCAP206C (E)</b>	0.65	0.69
<b>MUC 207</b>	22	12.3	<b>AP207</b>	<b>AP207C</b>	<b>MUCAP207C (E)</b>	0.88	0.91
<b>MUC 208</b>	24.9	14.3	<b>AP208</b>	<b>AP208C</b>	<b>MUCAP208C (E)</b>	1.09	1.17

**SQUARE FLANGE UNITS  
MUCAF 200**


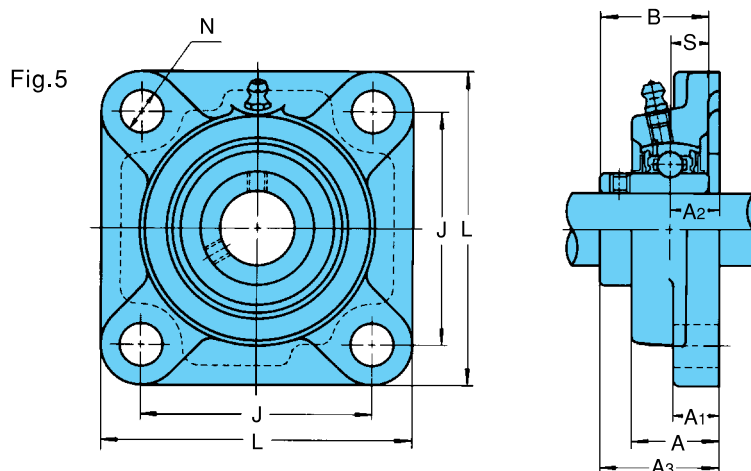


Table 8

Shaft dia. (mm)	Unit No.	Dimensions (mm)											Mounting bolt size
		L	J	A <sub>2</sub>	A <sub>1</sub>	A	N	A <sub>3</sub>	B	S	C <sub>1</sub>	Z <sub>s</sub>	
20	<b>MUCAF204</b>	86	64	15	12	25.5	12	33.3	31	12.7	8	43	M10
25	<b>MUCAF205</b>	95	70	16	14	27	12	35.7	34.1	14.3	11	48	M10
30	<b>MUCAF206</b>	108	83	18	14	31	12	40.2	38.1	15.9	9	51	M10
35	<b>MUCAF207</b>	117	92	19	16	34	14	44.4	42.9	17.5	8	54	M12
40	<b>MUCAF208</b>	130	102	21	16	36	16	51.2	49.2	19	10	62	M14

**SQUARE FLANGE UNITS FITTED WITH STAINLESS STEEL COVERS  
MUCAF 200C  
MUCAF 200E**

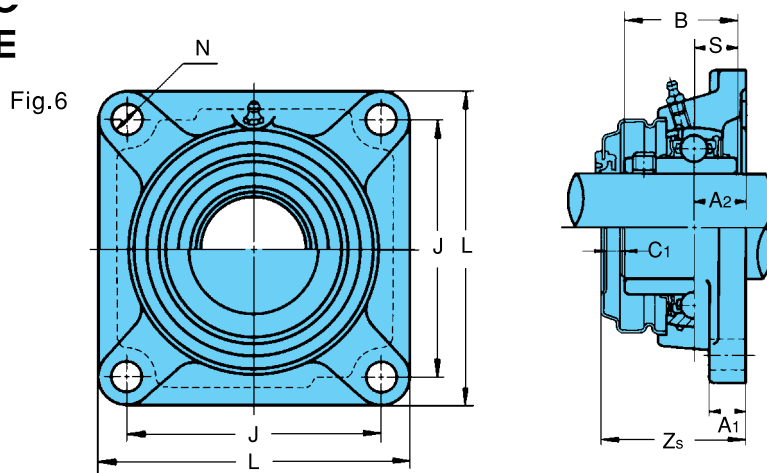

Bearing No.	Bearing		Housing No.		Unit No. with cover	Mass (kg)	
	Basic load rating (kN) [1kgf=9.8N]		Standard	With cover groove	With rubber sealed open cover (closed cover)	Standard	With covers
	C <sub>r</sub>	C <sub>or</sub>					
<b>MUC 204</b>	10.9	5.3	<b>AF204</b>	<b>AF204C</b>	<b>MUCAF204C (E)</b>	0.31	0.32
<b>MUC 205</b>	11.9	6.3	<b>AF205</b>	<b>AF205C</b>	<b>MUCAF205C (E)</b>	0.4	0.41
<b>MUC 206</b>	16.7	9	<b>AF206</b>	<b>AF206C</b>	<b>MUCAF206C (E)</b>	0.57	0.64
<b>MUC 207</b>	22	12.3	<b>AF207</b>	<b>AF207C</b>	<b>MUCAF207C (E)</b>	0.85	0.89
<b>MUC 208</b>	24.9	14.3	<b>AF208</b>	<b>AF208C</b>	<b>MUCAF208C (E)</b>	1.06	1.16

## 2-BOLT FLANGE UNITS MUCAFL 200

Fig.7


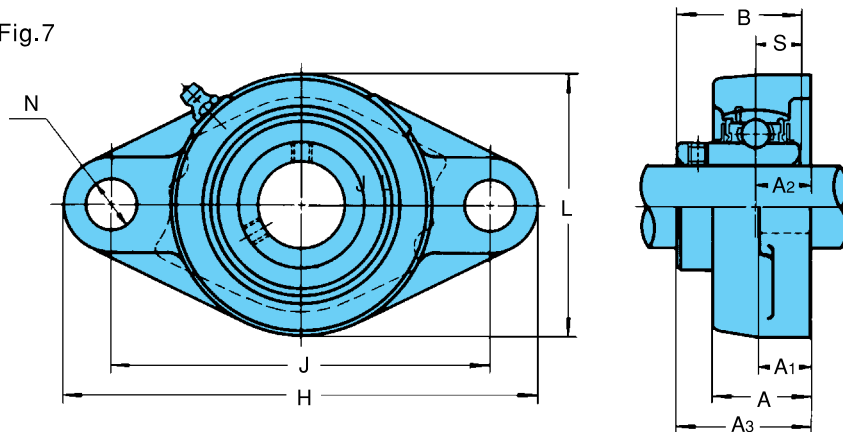


Table 9

Shaft dia. (mm)	Unit No.	Dimensions (mm)												Mounting bolt size
		H	J	A <sub>2</sub>	A <sub>1</sub>	A	N	L	A <sub>3</sub>	B	S	C <sub>1</sub>	Z <sub>s</sub>	
20	MUCAFL204	113	90	15	12	25.5	12	60	33.3	31	12.7	8	43	M10
25	MUCAFL205	130	99	16	14	27	16	68	35.7	34.1	14.3	10	47	M14
30	MUCAFL206	148	117	18	14	31	16	80	40.2	38.1	15.9	8	49	M14
35	MUCAFL207	161	130	19	16	34	16	90	44.4	42.9	17.5	8	54	M14
40	MUCAFL208	175	144	21	16	36	16	100	51.2	49.2	19	9	61	M14

## 2-BOLT FLANGE UNITS FITTED WITH STAINLESS STEEL COVERS MUCAFL 200C MUCAFL 200E

Fig.8

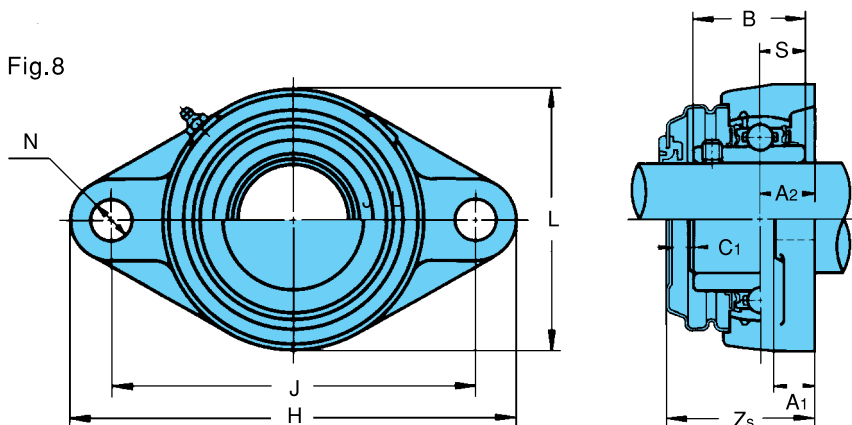

Bearing No.	Bearing		Housing No.		Unit No. with covers	Mass (kg)	
	Basic load rating (kN) (1kgf=9.8N)		Standard	With cover groove	With rubber sealed open cover (closed cover)	Standard	With covers
	C <sub>r</sub>	C <sub>or</sub>					
MUC 204	10.9	5.3	AFL204	AFL204C	MUCAFL204C (E)	0.26	0.27
MUC 205	11.9	6.3	AFL205	AFL205C	MUCAFL205C (E)	0.34	0.35
MUC 206	16.7	9	AFL206	AFL206C	MUCAFL206C (E)	0.53	0.54
MUC 207	22	12.3	AFL207	AFL207C	MUCAFL207C (E)	0.74	0.78
MUC 208	24.9	14.3	AFL208	AFL208C	MUCAFL208C (E)	0.95	0.98

## STAINLESS STEEL BEARING INSERTS MUC 200

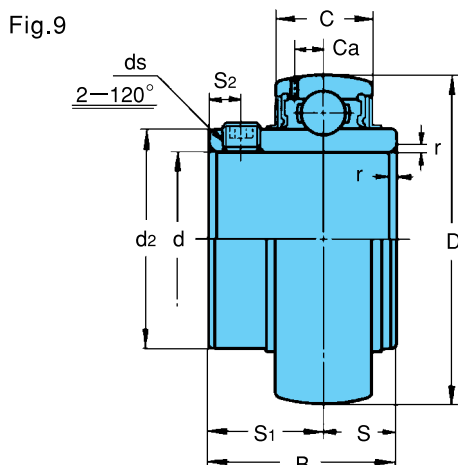


Table 10

Shaft dia. (mm)	Bearing No.	Dimensions (mm)											Basic load rating (kN) [1kgf=9.8N]		Mass (kg)
		d	D	B	C	r	S	S1	S2	ds	Ca	d2	Cr	Cor	
20	<b>MUC204</b>	20	47	31	17	1.5	12.7	18.3	4.5	M6×1	4.5	29	10.9	5.3	0.16
25	<b>MUC205</b>	25	52	34.1	17	1.5	14.3	19.8	5	M6×1	4.5	34	11.9	6.3	0.19
30	<b>MUC206</b>	30	62	38.1	19	1.5	15.9	22.2	5	M6×1	5.1	40.5	16.7	9.0	0.31
35	<b>MUC207</b>	35	72	42.9	20	2	17.5	25.4	6	M8×1	5.8	48	22.0	12.3	0.48
40	<b>MUC208</b>	40	80	49.2	21	2	19	30.2	8	M8×1	6.2	53	24.9	14.3	0.62

### 13. NOTICE

- (1) Static breaking strength of housings shown in Table 6 is based on the averaged values. A proper safety factor must be taken into account depending on the working load, its characteristics and directions.
- (2) Tighten two set-screws evenly according to the recommended tightening torque to prevent them from loosening due to vibration while in operation and to avoid inner-ring cracking due to overtightening. Mounting bolts should be tightened also according to their recommended tightening torque to avoid housing deformation due to overtightening.

### 14. SHAFT SELECTION

Table 11

Unit :  $\mu\text{m}$


Bearing No.	Loose fit		Tight fit
	js7	h7	m6
<b>MUC204</b> <b>MUC205</b> <b>MUC206</b>	$\pm 10.5$	0 ~ - 21	+ 21 ~ + 8
<b>MUC207</b> <b>MUC208</b>	$\pm 12.5$	0 ~ - 25	+ 25 ~ + 9

### 15. TYPICAL APPLICATIONS

Food Processing Machinery, Packaging Machinery,  
Medical Equipment, Chemical Equipment, Textile Machinery

# ASAHI

VERSATILE &  
HIGH QUALITY

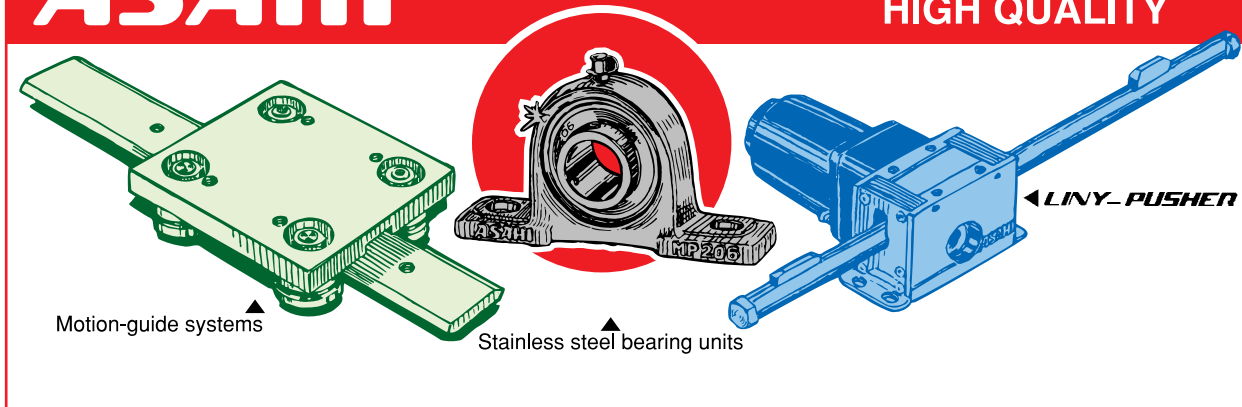

—Dimensions are subject to change without prior notice.—

<http://www.asahiseiko.co.jp>

## ASAHI SEIKO CO., LTD.

**FOREIGN TRADE DEPARTMENT** : 570-1, Otori-Higashi-machi 6-cho, Sakai City, Osaka 593-8324, Japan

Tel : +81-72-272-6900

Fax : +81-72-272-6903

e-mail address : ex-1@asahiseiko.co.jp

e-mail address : ex-2@asahiseiko.co.jp

**U.S.A. OFFICE** : P.O.Box 9108, 570 North Wheeling Road, Mount Prospect, Illinois 60056-9998 U.S.A

Tel : +1-847-759-0620

Fax : +1-847-759-0630

**HEAD OFFICE & FACTORY** : 570-1, Otori-Higashi-machi 6-cho, Sakai city, Osaka 593-8324, Japan

Tel : +81-72-271-1221

Fax : +81-72-273-0058