



MEGADYNE




EN

MEGAWELD

TECHNICAL
HANDBOOK

INDEX

Introduction to MEGAWELD belts	2
Product range	3
Belt Data	
Polyurethane V-belts	4
Polyurethane cogged V-belts	6
Polyurethane round belts	7
Special fabrications on request	8

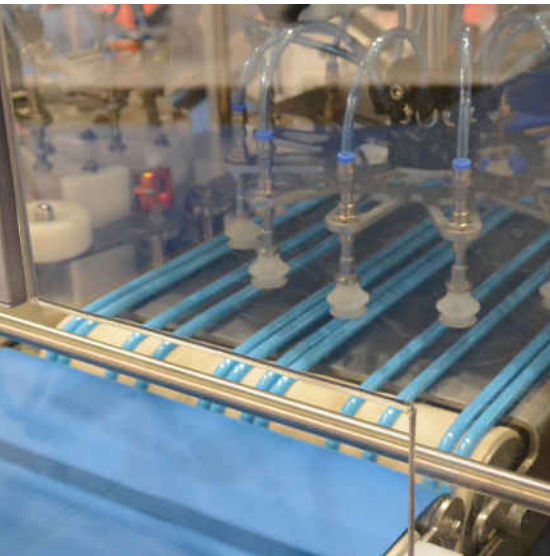

INTRODUCTION

TO MEGAWELD BELTS

MEGAWELD thermoplastic polyurethane, trapezoidal and round belts are manufactured by a unique extrusion process. They are suitable for a wide range of applications and industries.

MEGAWELD are used for conveying or for light power transmission in the following areas:

- Ceramic industry
- Glass industry
- Wood industry
- Brick and tile industry
- Gardening and horticulture
- Packagin industry
- Paper and board industry
- Pharmaceutical industry
- Food industry
- Robotic systems
- Automotive



MEGAWELD MATERIALS

Megadyne uses only virgin polymers to guarantee the best quality and the outstanding performance in all industrial applications.

MEGAWELD MAIN FEATURES

- High flexibility
- High resistance to pollution
- Good abrasion resistance
- Good welding characteristics
- Smooth running

Special features as hydrolysis resistance and high modulus of elasticity (e.i.) on request.



MEGAWELD TYPES (STANDARD & MADE TO ORDER)

- Blue FDA approved polyurethane
- Water and chemical resistance
- Metal detectable polyurethane on request with m.o.q.
- UV resistant materials
- Fiber glass reinforced
- Standard reinforced Kevlar® cords. Polyester cords on request.
- Other colours on request
- Soft grip cover

MEGAWELD FINISHES

- Gloss finishing
- Matt finishing
- Rough finishing
- Textured finishing
- Metallised finishing.




PRODUCT RANGE

POLYURETHANE V-BELTS

Trapezoidal thermo-welded polyurethane belts are available in different hardnesses and colours. Available with polyester* or aramide reinforcements. They are suitable for many industrial sectors including the food industry.

85 ShA	Z-A-B-C
85 ShA reinforced	A-B-C
85 ShA FDA	Z-A-B-C
85 ShA reinforced FDA	A-B-C
90 ShA	Z-A-B-C
90 ShA reinforced	Z-A-B-C

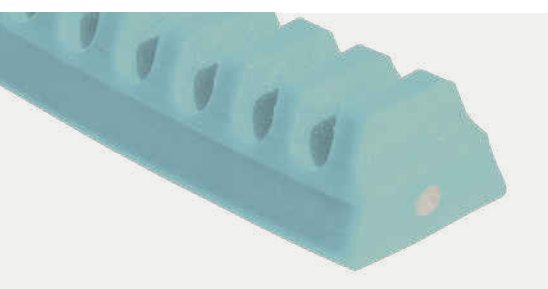

POLYURETHANE COGGED V-BELTS

Cogged trapezoidal thermo-welded polyurethane belts are available in different hardnesses and colours. Available with polyester* or aramide reinforcements

Cogged version allows the use of smaller pulleys.

90 ShA	Z-A-B-C
90 ShA reinforced	A-B-C



POLYURETHANE ROUND BELTS

Round thermo-welded polyurethane belts are available in different hardnesses and colours. Available with polyester* or aramide reinforcements. Particularly effective, thanks to the torsion characteristics, for line-shaft and powered-roller conveyor application.


PR 85 ShA	ø (mm): 2*-3-4-5-6-7*-8-9-10-12-15-18*-20*
85 ShA reinforced	ø (mm): 6*-7*-8-9*-10-12-15*-18*

*on request

POLYURETHANE

V-BELTS

PT 85

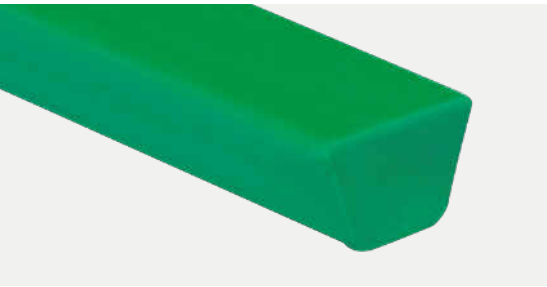

CODE	CROSS SECTION	TRACTION FORCE	CORRESPONDING ELONGATION (%)**	MINIMUM PULLEY DIAMETER
	BxH (mm)	(N)		
PT 85 Z	10x6	60	8	55
PT 85 A	13x8	120	8	70
PT 85 B	17x11	220	8	110
PT 85 C	22x14	360	8	130



PT 85 RK

CODE	CROSS SECTION	TRACTION FORCE	CORRESPONDING ELONGATION (%)**	MINIMUM PULLEY DIAMETER
	BxH (mm)	(N)		
PT 85 RK A	13x8	250	0,5	80
PT 85 RK B	17x11	400	1	125
PT 85 RK C	22x14	600	1,5	200



PT 85 FDA (blue)


CODE	CROSS SECTION	TRACTION FORCE	CORRESPONDING ELONGATION (%)**	MINIMUM PULLEY DIAMETER
	BxH (mm)	(N)		
PT 85 FDA Z	10x6	60	8	55
PT 85 FDA A	13x8	120	8	70
PT 85 FDA B	17x11	220	8	110
PT 85 FDA C	22x14	360	8	130

**Indicative values based on the average of test results.

POLYURETHANE

V-BELTS

PT 85 RK FDA (blue)

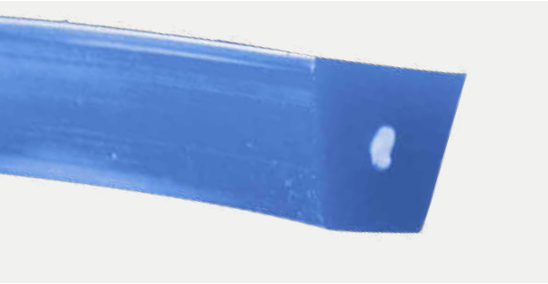

CODE	CROSS SECTION	TRACTION FORCE	CORRESPONDING ELONGATION (%)**	MINIMUM PULLEY DIAMETER
	BxH (mm)	(N)		
PT 85 RK FDA A	13x8	250	0,5	80
PT 85 RK FDA B	17x11	400	1	125
PT 85 RK FDA C	22x14	600	1,5	200



PT 90

CODE	CROSS SECTION	TRACTION FORCE	CORRESPONDING ELONGATION (%)**	MINIMUM PULLEY DIAMETER
	BxH (mm)	(N)		
PT 90 Z	10x6	110	5	65
PT 90 A	13x8	200	5	80
PT 90 B	17x11	360	5	130
PT 90 C	22x14	600	5	180



PT 90 RK


CODE	CROSS SECTION	TRACTION FORCE	CORRESPONDING ELONGATION (%)**	MINIMUM PULLEY DIAMETER
	BxH (mm)	(N)		
PT 90 RK A	13x8	300	1	110
PT 90 RK B	17x11	500	1,5	140
PT 90 RK C	22x14	750	1,5	230

**Indicative values based on the average of test results.

POLYURETHANE

COGGED V-BELTS

PTD 90

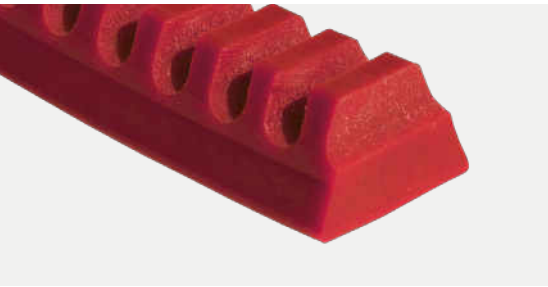

CODE	CROSS SECTION	TRACTION FORCE	CORRESPONDING ELONGATION (%)**	MINIMUM PULLEY DIAMETER
	BxH (mm)	(N)		
PTD 90 A	13x8	140	5	65
PTD 90 B	17x11	250	5	90
PTD 90 C	22x14	420	5	120




PTD 90 RK

CODE	CROSS SECTION	TRACTION FORCE	CORRESPONDING ELONGATION (%)**	MINIMUM PULLEY DIAMETER
	BxH (mm)	(N)		
PTD 90 RK A	13x8	300	1	70
PTD 90 RK B	17x11	500	1,5	110
PTD 90 RK C	22x14	750	1,5	150

POLYURETHANE

ROUND BELTS

PR 85 NL (rough)

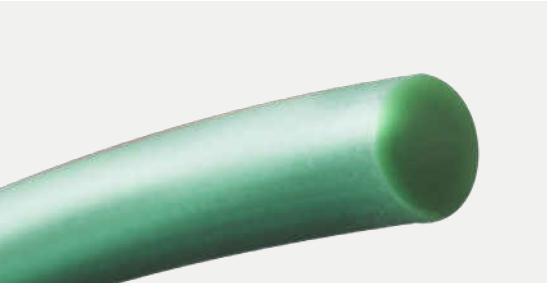

CODE	CROSS SECTION	TRACTION FORCE	CORRESPONDING ELONGATION (%)**	MINIMUM PULLEY DIAMETER
	BxH (mm)	(N)		
PR 85 NL 2*	2	4,7	8	10
PR 85 NL 3	3	10	8	15
PR 85 NL 4	4	19	8	25
PR 85 NL 5	5	29	8	30
PR 85 NL 6	6	42	8	40
PR 85 NL 7*	7	57	8	50
PR 85 NL 8	8	75	8	55
PR 85 NL 9	9	95	8	65
PR 85 NL 10	10	118	8	75
PR 85 NL 12	12	170	8	90
PR 85 NL 15	15	265	8	120
PR 85 NL 18*	18	381	8	150
PR 85 NL 20*	20	462	8	200



PR 85 NL RK (rough)

CODE	CROSS SECTION	TRACTION FORCE	CORRESPONDING ELONGATION (%)**	MINIMUM PULLEY DIAMETER
	BxH (mm)	(N)		
PR 85 NL RK 6*	6	70	0,5	50
PR 85 NL RK 7*	7	100	0,5	60
PR 85 NL RK 8	8	120	0,5	75
PR 85 NL RK 9*	9	170	1	85
PR 85 NL RK 10	10	230	1	90
PR 85 NL RK 12	12	330	1,5	120
PR 85 NL RK 15*	15	500	1,5	150
PR 85 NL RK 18*	18	680	1,5	180

*On request | **Indicative values based on the average of test results.

SPECIAL FABRICATIONS

ON REQUEST

Megadyne can offer varied specialist fabrications processes, increasing MEGAWELD features like grip, temperature range and wear resistance. Megadyne's technical department is available for design advice, to reach the optimal design solution.



V-BELT WITH PVC NAP COATING

Available in the trapezoidal or cogged versions.


The Gripface coating is used to gain an increased surface coefficient of friction. This is particularly useful to control products at high speeds or in inclined or declined applications. This cover is resistant to common lubricant oils and water.



V-BELT WITH RUBBER NAG COATING

Available in the trapezoidal or cogged versions.

The Gripface coating is used to gain an increased surface coefficient of friction. This is particularly useful to control products at high speeds or in inclined or declined applications. Widely used on packaging machines. This cover is very wear resistant.

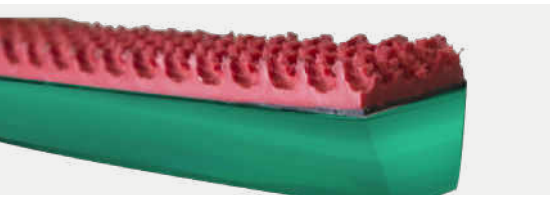

V-BELT WITH ARAMIDE FELT SURFACE

Available in the trapezoidal or cogged versions.


The coating used for conveying hot products, giving high heat resistance and a lower friction coefficient.



V-BELT WITH TENAX SURFACE

Available in the trapezoidal or cogged versions.

The coating is used for conveying abrasive materials. The coating offers a high friction coefficient and excellent wear resistance.

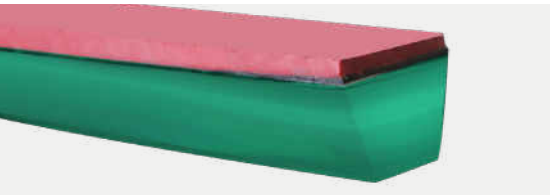



SPECIAL FABRICATIONS

SPECIAL MATERIALS ON REQUEST

HIGH UV RESISTANT MATERIAL

- Resistant to UV light
- Reduces fading, yellowing and premature ageing

REINFORCED MATERIALS

- Standard reinforced Kevlar cords. Polyester cords on request.
- Higher loadings
- Lower elongation

DETECTABLE FOR THE FOOD INDUSTRY

- Materials that can be sensed by metal detectors on request with m.o.q.
- Blue and orange increases visual detection rates

EXTRA CLEAR

- High clarity transparent grades available
- Can also be UV resistant to prolong the clarity level

CO-EXTRUSION

- Materials of different types and hardness can be extruded together

SURFACE FINISH

- Special surface finishes
- Profiling the surface

SPECIAL TREATMENT ON REQUEST

POST MANUFACTURE PROCESSING

- Profiles can be treated after extrusion
- Oven heating to pre-defined temperatures over 24 hours
- Improves the mechanical properties and stability



SPECIAL FABRICATIONS

SPECIAL FABRICATION ON REQUEST

COGGED

- All Vee profiles can be cogged
- Increases flexibility
- Improves the minimum pulley rating
- Add "D" as a suffix to the belt code

ADDED COVERS

- PU Soft grip
- PVC Super grip
- Ultra grip rubber
- Polyester
- Felt
- Cellular foams
- Linatex

ENDLESSING

- We can supply individual belts, endlessed to your specified lengths
- Equipment available for clients to endless weld in house

CALENDERED SHEET

- Sheet at 400mm and 700mm available
- These can be endlessed to produce tapes and bands for special applications
- Finished belts can also be profiled with different surface finishes

CHEMICAL PRODUCT RESISTANCE*

Megadyne thermoplastic polyurethane V-belts, have many varied industrial applications and may be in contact with different contaminants. The TPU resistance to chemical depends on many factors, such as temperature, chemical concentration and TPU hardness.

**Chemical resistance declaration on request.*

The data and information contained in the present catalogue are updated to the date of the catalogue's printing. Ammega Italia S.p.A. reserves the right to modify the specifications, performances and other information relating to the belts described in the present catalogue, at any time at its own discretion, without any prior notice.

For updating refer to our website www.megadynegroup.com.

Technical specifications, performances and other information provided in the present catalogue are indicative and do not bound Ammega Italia S.p.A. unless such specifications, performances or other information are expressly agreed in the agreement with the customer.

We also recommend to read carefully the following documents on our web site www.megadynegroup.com:

- Ammega Italia S.p.A. General Conditions of Sale (comprising the warranty)
- Theoretical Belt Life.
- Drive Components: Storage, Installation, Maintenance and Troubleshooting Handbook
- Belts standard use condition and temperature.

Copyright Notice: Ammega Italia S.p.A. copyright. All rights reserved.

Ammega Italia S.p.A. is and shall remain the owner of all rights on drawings, technical specifications and any other information contained in the present catalogue or otherwise communicated by Ammega Italia S.p.A. to the customer.

The customer shall not disclose such information to third parties or use such information for purposes different from the definition of the order to Ammega Italia S.p.A., unless upon prior written authorization of Ammega Italia S.p.A.

Discover Your Local Contacts

The local partner of choice
for sustainable power transmission belting solutions
around the globe.



General contact information:

Megadyne

Via Trieste, 16
Via S. Lucia 114 - 10075 Mathi (Torino)
Italy

megadynegroup.com

megadynegroup.com/en/contact-us



Scan the QR code
and find your local
contact

