

INDUSTRY MAINTENANCE TOOLS



www.ntn-snr.com



With You

Experts & Tools





We provide you a complete solution of tools and services for your bearings, suited to your application, size and resources

Experts
& Tools

NTN-SNR Experts & Tools, at the service of our customers

Because expectations for the maintenance and mounting of bearings are specific to each customer, Experts & Tools offers you solutions that take into account your application and its importance to you as an available resource.

Each application requires special expertise. Maintaining a wind turbine is different to maintaining a printing press or a meat mincer. With the theoretical and practical experience we have accumulated over almost a century of dealing with industrial applications, NTN-SNR can provide you with the expertise and tools you need.

The scale and difficulty of your mounting and maintenance tasks determine our recommendations. We provide a customised response in terms of tools and organisation, suited to your situation.

► **The NTN-SNR Group**, with more than 25,500 employees worldwide, produces and improves maintenance tools and methods on a daily basis. Our aim is to bring you products and procedures that are safe and easy for your staff to use. The design of our tools is aimed at increasing your efficiency.

By reducing the amount of time it takes for mounting, dismantling as well as maintenance operations, and by maximising the working life of your bearings, our tools provide you with real savings and safety in use and will not damage the machinery they are being used on.

This catalogue contains the entire range of NTN-SNR maintenance tools. Our range of greases, greasers and centralised lubrication systems is contained in a separate catalogue.

► **If you decide to sub-contract your maintenance operations:** the Experts & Tools teams can take care of this, based on agreed availability targets for your machinery.

Experts & Tools offers you a range of services that can be customised to meet your specific requirements:

- **Theoretical** and practical training for your employees.
- **Expertise** on your damaged bearings (on site or in our laboratories).
- **Supervision** of the dismantling or mounting of your critical bearings. Of particular interest for larger bearings where we can supply appropriate tools, including handling tools.
- **Rental** of maintenance tools: induction heaters, hydraulic nuts and pumps, etc.
- **Diagnosis** of your lubrication installations or an analysis of your needs, with the production and installation of appropriate standard or customised equipment.
- **Renovation** of bearings removed from equipment as part of a preventive maintenance program.



MAIN CAUSES OF FAILURES OF YOUR BEARINGS

► The monitoring of the millions of NTN-SNR bearings sold has allowed us to establish very precise statistics on the origin of faults. This collection of data highlights one essential fact: it is rare that the bearing itself is the cause of a premature failure.

In 90% of cases, the causes can be found in external components which can be classified into four categories:

INAPPROPRIATE LUBRICATION (55%)

Inappropriate or incorrect lubrication significantly reduces the service life of the bearing.

It is often neglected because of bearing accessibility problems and a lack of knowledge about lubricants on the side of the user.

The choice of lubricant, the method, the quantity to apply to the bearing (neither too much nor too little) and the monitoring frequency must be properly studied.

NTN-SNR offers you a special service and markets a complete range of greases covering all applications, as well as an automatic greasing system.

INCORRECT MOUNTING (17%)

The mounting of a bearing on a machine is a key stage in determining the length of its life. A bearing that is not mounted correctly can deteriorate very quickly.

The main causes are:

- *Insufficient or poorly adapted methods and resources,*
- *Contamination during mounting,*
- *The use of force during mounting,*
- *Poor preparation of the receiving components: shafts and housings outside tolerance, poor access for the lubricant, misalignment.*

Abnormal noise levels can be a warning sign of deterioration. In the short term this causes fatigue of the bearing surfaces. NTN-SNR can provide you with mounting and dismounting services or tools and equipment to make these operations easier and more secure.

POLLUTION (18%)

The environment in which bearings operate is often highly polluted. Dust, liquid detergents, and other contaminants can severely reduce the working life of a bearing.


To deal with these problems, NTN-SNR has developed a comprehensive range of sealing systems and will be pleased to advise you on the best choice for your application.

FATIGUE (10%)

Bearings are key components and are subject to fatigue. Even more so since they rarely operate in ideal conditions (overloaded machine, insufficient lubrication, etc.)

The stresses that active surfaces of bearings are subjected to create surface pitting damage sooner or later.

Our monitoring methods and support from our experts will enable you to act on the first indication of failure and organise appropriate maintenance operations.

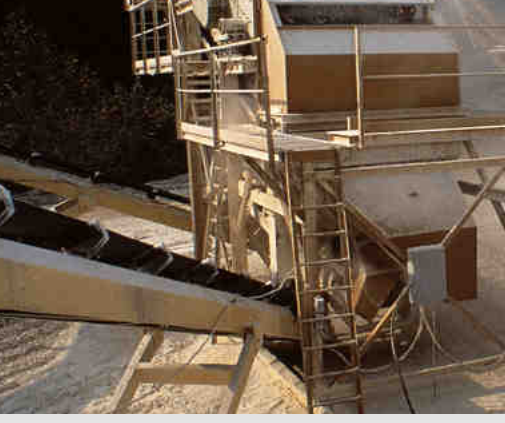

GENERAL CONTENTS

P. 7 MOUNTING & REMOVAL

- Cold mounting 8
- Hot mounting 12
- Mechanical dismounting 17
- Hydraulic mounting and dismounting 26




P. 31 SAFETY & MEASUREMENT

- Safety instrument 32
- Measurement instruments 32



P. 35 TECHNICAL DATA

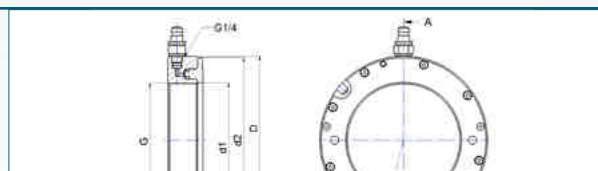

P. 54 GLOSSARY

| | |
|---|---|
| TOOL HS (min. size –max. size) / HOOK SPANNER | Articulated manual hook spanner |
| TOOL IFT SET 33 / INDUSTRY FITTING TOOL SET | Mounting tool kit with 33 pieces |
| SMARTTEMP 301 / IR THERMOMETER | Infrared thermometer targeting ratio 30 : 1 |



CONTENTS

MOUNTING & DISMOUNTING

P. 8 COLD MOUNTING

- Mounting tool kit case 9
- Anti-fretting paste 11
- Adjustable spanners 11

P. 12 HOT MOUNTING

- Heating equipment 14

P. 17 MECHANICAL DISMOUNTING

- Bore puller kits 18
- Deep-groove ball bearings extractor kit 19
- Self-centering mechanical puller 20
- Self-centering hydraulic puller 21
- Case of accessories for hydraulic puller 22
- Tri-section pulling plate 23
- Puller - separator kit 24
- Hydraulic puller for mounting and dismounting 25

P. 26 HYDRAULIC MOUNTING AND DISMOUNTING

- Hydraulic nuts 28
- Manual hydraulic pump kits 29
- Extended tubes 30

MOUNTING & REMOVAL COLD

GOOD PRACTICES FOR COLD MOUNTING





Cold mounting is the simplest method and is suitable for small and medium-sized bearings, completed with the normal adjustments.

OUR RECOMMENDATIONS:

The most frequently observed problems:

- Over- or under-tightening when adjusting.
- Excessive impacts during mounting or forces causing rings and seals to break, or races to become indented.
- The accidental introduction of particles or liquids present in the mounting environment.

► The bearing must be tightened on the rotating element to which it is fitted. See table below.

| | Analysis of rotation (% Incidence) | | Retention method |
|---|--|--|-------------------------------|
| Fixed load with respect to the outer ring | Fixed housing and load (95%)  Rotating inner ring | Rotating housing and load (0.5%)  Stationary inner ring | Inner ring tightened on shaft |
| Fixed load with respect to the inner ring | Stationary shaft and load (3%)  Rotating outer ring | Rotating shaft and load (1.5%)  Fixed outer ring | Outer ring tight in housing |


OUR RECOMMENDATIONS TO BE FOLLOWED:

- Check bearing identifying marks against drawings, specifications and procedures.
- Check that bearing seat dimensions and the accuracy of their shape and position correspond to NTN-SNR drawings and specifications.
- Prepare all equipment, tools and parts required before starting assembly.
- Carefully clean and check all parts and devices in the bearing's environment.
- Remove the bearing from its packaging at the last moment in a completely clean working area.

- Never wash it, except in specified exceptional cases. The bearing is protected from oxidation by a light film of oil compatible with all lubricants.
- Mount the bearing, using the chosen method.
- Lubricate, using a special bearing grease, following the instructions given.
- After mounting and before final start-up, check its operation, so as to detect any possible anomalies (noise, vibrations, temperature, abnormal play, etc.).

IN PRACTICE:

► The sleeve is mounted by means of impact rings applied against the bearing ring which has the tightest fit. This avoids stressing the rotating body and damaging the bearing.

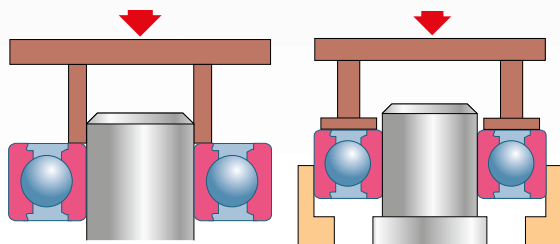

► In the case of a long shaft for mounting requiring longitudinal adjustment of the bearing, we prefer using a mechanical sleeve with tapered contact surface associated with a tapered bore bearing.



► WHAT THE NTN-SNR EXPERTS HAVE TO SAY:

For easier mounting and to avoid contact corrosion of the shaft or the housing, always use an anti-fretting paste. This thick lubricant helps preserve the quality of parts surfaces subjected to sliding forces. Without this compound, corrosion would progressively cause the fit between bearing and shaft (or housing) to deteriorate, ultimately leading to vibrations and even the premature deterioration of the bearing and its mounting surfaces.

The anti-fretting paste also avoids introducing any pollutant during assembly (metal chips, liquid, etc.)



COLD MOUNTING TOOL KIT CASE

The NTN-SNR tool kit enables the quick, accurate and safe mounting of bearings.

36



APPLICATIONS

The use of a suitable socket, associated with the mounting sleeve, enables to install the bearing to the desired adjustment. The simultaneous support of the outer and inner rings prevents the risk of deterioration of the races and rotating assemblies. The kit can also be used for assembling other components such as sealing rings, sprockets and pulleys.

ADVANTAGES

Of light and strong construction for workshop use, this toolbox contains:

33 impact rings:

- Very robust for a long working life.
- In impact-resistant, synthetic material, avoiding any metal-to-metal contact.
- Ideal for use in conjunction with a press.
- Calibrated for approximately 400 different bearings:
 - with bore diameters between 10 and 50 mm
 - and with outside diameters between 26 and 110 mm
- Clearly and permanently identified to aid selection.

3 mounting sleeves:

- Light and extremely robust, made of aluminium.
- With a good grip for the hand.

1 special dead blow mallet, ensuring optimum impact force is applied.


COMMERCIAL REFERENCE

TOOL IFT SET 33 / Industry Fitting Tool Set

SPARE PARTS (to order)

- **Impact ring**
TOOL IMPACT RING (tube A,B,C), socket
Example: *TOOL IMPACT RING A 10-25*
- **Dead-blow mallet**
TOOL IMPACT RING HAMMER
- **Mounting sleeve**
TOOL IMPACT RING SLEEVE (tube A,B,C)
Example: *TOOL IMPACT RING SLEEVE A*
- **Socket for mounting sleeve**
TOOL IMPACT RING LOOSE RING (tube A,B,C)
Example: *TOOL IMPACT RING LOOSE RING A*

Mounting sleeve








Socket for the mounting sleeve



Impact ring



Dead-blow Mallet



MOUNTING & REMOVAL COLD

COLD MOUNTING TOOL KIT CASE - TECHNICAL DATA

| Ref. Tubes | Ref. Bushings | Series 60 62 63 64 16 62/63/98 | Series 622 623 630 | Series 12 22 13 23 | Series 72 73 | Series 32 52 33 53 | Series 213 222 223 | Series 10 2 3 22 23 | Series C22 C40 | Series 42 43 |
|------------|--------------------|--------------------------------|------------------------|------------------------------|--------------|------------------------------|--------------------|---------------------|----------------|----------------------|
| A | 10 / 26 | 629 16100 6000 | 63000 | 129 | | | | | | |
| | 10 / 30 | 6200 | 62200 | 1200 2200 | 7200 | 3200 5200 | | | | 4200 |
| | 10 / 35 12 / 28 | 6300 6001 16101 | 62300 63001 | | | | | | | |
| | 12 / 32 | 6201 | 62201 | 1201 2201 | 7201 | 3201 5201 | | | | 4201 |
| | 12 / 37 | 6301 | 62301 | 1301 2301 | 7301 | | | | | 4301 |
| | 15 / 32 | 16002 6002 6202 | 63002 | | | | | 202 | | 4202 |
| | 15 / 35 | 6302 | 62302 | 1202 2203 1302 2302 | 7202 7302 | 3202 5202 3302 5302 | | | | |
| | 17 / 35 | 16003 6003 | 63003 | | | | | | | |
| | 17 / 40 | 98203 6203 6303 | 62203 | 1203 2203 1303 2303 | 7203 7303 | 3203 5203 3303 5303 | | 203 2203 303 | | 4302 4203 4303 |
| | 20 / 42 | 16004 98204 6004 | 63004 | | | | | | | |
| | 20 / 47 | 6204 | 62204 | 1204 2204 | 7204 | 3204 5204 | | 204 2204 | | 4204 |
| | 20 / 52 | 6304 | 62304 | 1304 2304 | 7304 | 3304 5306 | 22205/20 | 304 2304 1005 | | 4304 |
| | 25 / 47 | 16005 6005 62/22 | 63005 | | | | | | | |
| | B | 25 / 52 | 98205 6205 63/22 | 62205 | 1205 2205 | 7205 | 3205 5205 | 22205 | 205 2205 | C2205 |
| 25 / 62 | | 6305 6403 | 62305 | 1305 2305 | 7305 | 3305 5305 | 21305 | 305 2305 | | 4305 |
| 30 / 55 | | 16006 6006 62/28 | 63006 | | | | | 1006 | C6006 | 4206 |
| 30 / 62 | | 98206 6206 63/28 | 62206 | 1206 2206 | 7206 | 3206 5206 | 22206 BS2-2206 | 206 2206 | C2206 | |
| 30 / 72 | | 6306 6404 | 62306 | 1306 2306 | 7306 | 3306 5306 | 21306 2306 | 306 | | 4306 |
| 35 / 62 | | 16007 6007 | 63007 | | | | | 1007 | | |
| 35 / 72 | | 6207 | 62207 | 1207 2207 | 7207 | 3207 5207 | 22207 BS2-2207 | 207 2207 | C2207 | 4207 |
| 35 / 80 | | 6307 6405 | 62307 | 1307 2307 | 7307 | 3307 5307 | 21307 | 307 2307 1008 | | 4307 |
| C | 40 / 68 | 16008 6008 | 63008 | | | | | | | |
| | 40 / 80 | 6208 | 62208 | 1208 2208 | 7208 | 3208 5208 | 22208 BS2-2208 | 208 2208 | C2208 | 4208 |
| | 40 / 90 | 6308 6406 | 62308 | 1308 1308 | 7308 | 3308 5308 | 21308 22308 | 308 2308 1009 | | 4308 |
| | 45 / 75 | 16009 6009 | 63009 | | | | | | | |
| | 45 / 85 | 6209 | 62209 | 1209 2209 | 7209 | 3209 5209 | 22209 BS2-2209 | 209 2209 | C2209 | 4209 |
| | 45 / 100 | 6309 6407 | 62309 | 1309 2309 | 7309 | 3309 5309 | 21309 22309 | 309 2309 | | 4309 |
| | 50 / 80 | 16010 6010 | 63010 | | | | | 1010 | C4010 | |
| | 50 / 90 | 6210 | 62210 | 1210 2210 | 7210 | 3210 5210 | 22210 BS2-2210 | 210 2210 | C2210 | 4210 |
| | 50 / 110 | 6310 6408 | 62310 | 1310 2310 | 7310 | 3310 5310 | 21310 22310 | 310 2310 | | 4310 |

MOUNTING PASTE – ANTI-FRETTING AGENT

The NTN-SNR mounting paste is specially designed to prevent contact rust, wear and fretting corrosion between 2 metal surfaces.

36

It is an innovative heavy metal free paste, which is safe for the environment.



APPLICATIONS

- Contact corrosion, also known as fretting corrosion, appears in assemblies subjected to vibration or very slight slippage or oscillation. It can lead to the serious deterioration of bearings and other machine components and thus make dismounting very difficult.

ADVANTAGES

- Allows slippage for assemblies with play (wheel bearings, vibrating screens, etc.).
- Preserves the quality of the surfaces and the adjustment of mechanical assemblies by preventing contact (fretting) corrosion.
- Facilitates the mounting and dismounting of bearings and components such as nuts, bolts, pins, flanges, couplings, fluted shafts, etc.
- Water and washing resistant.
- Cost saving considering its light density (0.910) and subsequently lower consumption.
- Grease without heavy metals (Zn, Cu, Pb) and powdered graphite.
- Temperature range for use -30°C to +145°C.

COMMERCIAL REFERENCES

LUB MOUNTING PASTE / T 60G
LUB MOUNTING PASTE / B 500G

ADJUSTABLE SPANNERS

10 spanners for tightening and loosening up to 30 differently sized nuts!

36



APPLICATIONS

- NTN-SNR adjustable spanners enable the safe and effortless tightening and loosening of all KM, KML and KMK type nuts and also B, TB, BR and TBR precision nuts. They avoid any damage to the nuts or the shaft.

ADVANTAGES

- Made of special tempered steel, these spanners are extremely strong.
- The joint with its spring washer guarantees gentle reliable operation.
- The laser-etched imprint makes them easily and permanently identifiable.
- The hole in the handle makes them easy to store.
- They are adaptable to cover nut diameters from 15 to 180 mm.

Available in two versions:

With pins for nuts with holes

With hook for slotted nuts



COMMERCIAL REFERENCES

TOOL PS (size) / Pin Spanner (with pin)
TOOL HS (size) / Hook Spanner (with hook)

MOUNTING & REMOVAL HOT

GOOD PRACTICES FOR HOT MOUNTING

Hot mounting makes it possible, by raising the temperature of a rotating part, to expand the inner ring of a bearing or bore diameter of a sprocket so that it can be fitted over the shaft with ease.

- In the event of a tightly fitting outer ring, prior to the insertion of the bearing, the housing may be made to expand through heating.
- Conversely, a shaft can also be cooled using liquefied gas in order to facilitate its insertion into the inner ring of the bearing.


NTN-SNR's induction heaters provide the best solution in terms of safety, efficiency and ease of use compared with oil-bath heating, hot plates or ovens.

Heating using a blowtorch is to be prohibited: it generates localised temperatures that alter the hardness of the bearing and so shorten its service life.


PRINCIPLE OF HEATING BY INDUCTION

The device is comprised of a laminated steel core surrounded by a coil with multiple windings. When a current passes through it, this primary coil generates a magnetic field which itself induces an electric current in the bearing (or other steel part), substituted for the secondary coil of an electrical transformer.

When a high-intensity, low voltage AC current passes through it, the part heats up quickly; while non-metallic parts and the device itself remain cool.



Induction heating magnetises the part. It is therefore necessary for the heater to demagnetise it at the end of the heating cycle. This avoids steel particles being attracted into the bearing later on.



THE WORDS OF AN NTN-SNR EXPERT:

The temperature should not be too high so as not to modify the characteristics of the steel (maximum 130°C) or the internal components of the bearing.

On the other hand, the temperature must be high enough to generate sufficient expansion for the easy installation of the bearing through temporarily loosening the fit.

The heating temperature is a function of the ambient temperature, on the other hand, and the fit of the seat on the other.

The mounting of a part onto a shaft or into a housing requires a certain skill for proper alignment. The use of anti-fretting paste facilitates insertion and protects the shaft or housing from fretting corrosion.

Wearing of heat insulating gloves is essential for the safe and comfortable handling of the heated parts.


In the case of heavy parts, help will be required for their handling (use of a textile sling and mobile hoist or even an overhead crane).

SENSITIVE BEARINGS:

Heating too fast and too much can alter the properties of the material and significantly reduce the life of the bearing.

Furthermore, expanding the inner ring too quickly relative to the outer ring, can subject the rolling elements to significant stresses that can lead to their deterioration or that of the raceway.

A function such as the Temperature mode with 2 sensors of SmartTEMP devices makes it possible to control the temperature delta between the rings.



PARTS SENSITIVE TO INCREASE IN TEMPERATURE (SPROCKETS):

Some parts like sprocket are extremely sensitive to sudden changes in temperature.

For a sprocket, the teeth are subject to significant mechanical stress (see opposite). Heterogeneous heating in this area can lead to mechanical deformations, and later, to rupture of teeth under stress.

The linear and uniform heating of sensitive parts (Ramp mode) offered by the devices in the SmartTEMP range makes it possible to prevent this risk.



THE RIGHT QUESTIONS TO ASK YOURSELF WHEN SELECTING A HEATING DEVICE

- Type of part to heat (sprocket, bearing, etc.) and its sensitivity.
- How big are the parts to be heated? (Max. external diameter, max. width, min. and max. bore)
- What are the minimum and maximum weights of the parts?
- What temperature has to be achieved?
- What electrical current and voltage are available in the workshop?

THE KEY ADVANTAGES OF THE SMART TEMP RANGE:

SINGLE-POINT HEATING MANAGEMENT

From simple to extremely sensitive part, from the bearing to the sprocket, the NTN-SNR range offers the most suitable solution with real-time heating analysis and control.

Depending on the type of part to be heated, 4 heating modes are available:

- A *Temperature* mode using a sensor for non-sensitive parts.
- A *Time* mode that enables to adjust the heating time only.
- A *Ramp* mode for linear and controlled temperature rise dedicated to sprockets and other parts sensitive to temperature gradients.
- A *Temperature* mode with 2 sensors to control the temperature delta between inside and outside diameters. Particularly suitable for sensitive bearings.



EASY TO USE

Hot mounting is so simple due to the setting up, management and extraction of data facilitated by an innovative touch screen.

- Simple instructions available in several languages.
- Temperature vs. time graph.
- Extraction of data via USB key.
- Automatic probe detection.
- Simplified maintenance by self-diagnosis at every start-up.



HIGH PERFORMANCE

The SmartTEMP induction heaters adapt to any type of part, ensuring uninterrupted operation with reduced energy consumption.

- First device to be able to heat a bearing or a solid part of the same weight.
- Better market efficiency thanks to a new state-of-the-art processor (30% time saving compared to standard machines).
- Self-regulation of energy consumption according to the part to be heated.
- Electronics and heat-resistant materials that can ensure intensive and continuous use.



CONTROL AND SAFETY

- Optimum control of the heating cycle by microprocessor and magnetic temperature probe.
- Industrial screen resistant to projections and impacts.
- Thermal insulation of the magnetic probe.
- The equipment uses a default recommended temperature of 110°C.
- Maximum heating temperature: +240°C.
- Maintaining the final temperature when it is reached.
- Automatic demagnetising at the end of the cycle.
- Only the part to be heated is subjected to an increase in temperature (easier handling, no risk of burning).
- No emanation of smoke.
- Meets EEC legislative standards.
- Robust industrial design.



SmartTEMP S

38

Portable induction heater.
 Combines all the features of the SmartTEMP range in a compact device.
 Lightweight and easy to use, can heat a part weighing up to **50 kg**.



BENEFITS

- Small, **light** heater: weighs only 21 kg. 230 V/13 A power supply.
- **High performance**: Designed for all bearings and rotating parts with a bore diameter above **10 mm** with a maximum diameter of **400 mm** and a maximum weight of **50 kg**.
- **Safe**: 4 heating modes: Time, Ramp, Temperature (1 sensor), Temperature (2 sensors). Second sensor optional.
- **Easy to use**: Interactive touch screen enabling precise control of the device (heating settings and graphics). Several languages available.
- **Extraction** of heating data (USB).

Delivered as standard with its 3 yokes, a pair of gloves and a sensor. (Optional carrying case)

COMMERCIAL REFERENCE

TOOL SMART TEMP S / induction heater

SmartTEMP M

38

Induction heater with pivoting yoke, a best-seller for maintenance or production workshops, which can heat a bearing weighing up to **100 kg**.



BENEFIT

- Used as fixed equipment. 230 V/16 A power supply.
- It is **compact**, weighing only 40 kg, and can be easily moved using its 2 side handles.
- **High performance**: Designed for all bearings and rotating parts with a bore diameter above **10 mm** with a maximum diameter of **500 mm** and a maximum weight of **100 kg**.
- **Safe**: 4 heating modes: Time, Ramp, Temperature (1 sensor), Temperature (2 sensors). Second sensor optional.
- **Easy to use**: Interactive touch screen enabling precise control of the device (heating settings and graphics). Several languages available.
- **Extraction** of heating data (USB).
- **Ergonomic** with its standard pivoting yoke which facilitates the loading of the parts to be heated.

Delivered as standard with a probe, a pair of gloves and a yoke for bore diameter greater than or equal to 70 mm. Other yoke sizes are available as an option and must be ordered according to the application.

COMMERCIAL REFERENCE

TOOL SMART TEMP M / induction heater

Compact induction heater, providing high heating power for parts weighing up to **200 kg**.



BENEFITS

- 400 V/20 A power supply.
- **High performance:** Designed for all bearings and rotating parts with a bore diameter over **20 mm**, with a maximum outside diameter of **600 mm** and a maximum weight of **200 kg** in a horizontal position.
- **Safe:** 4 heating modes: Time, Ramp, Temperature (1 sensor), Temperature (2 sensors).
- **Easy to use:** Interactive touch screen enabling precise control of the device (heating settings and graphics). Several languages available.
- **Extraction** of heating data (USB).
- **Ergonomic** with its standard pivoting arm which facilitates the loading of the parts to be heated.

Delivered as standard with 2 sensors, a pair of gloves and a yoke for bore diameter greater than or equal to 100 mm. Other yoke sizes are available as an option and must be ordered according to the application.

COMMERCIAL REFERENCE

TOOL SMART TEMP L / induction heater

Powerful induction heater for parts weighing up to **400 kg**.



BENEFITS

- 400 V/32 A power supply.
- **High performance:** Designed for all bearings and rotating parts with a bore diameter over **30 mm**, with a maximum outside diameter of **1 000 mm** and a maximum weight of **400 kg** in a horizontal position.
- **Ergonomic:** Available in two versions, with or without pivoting yoke. The pivoting yoke makes the device more suitable for loading medium sized parts while the standard version is particularly suitable for large parts.
- **Safe:** 4 heating modes: Time, Ramp, Temperature (1 sensor), Temperature (2 sensors).
- **Easy to use:** Interactive touch screen enabling precise control of the device (heating settings and graphics). Several languages available.
- **Extraction** of heating data (USB).

Available with pivoting or movable vertical yoke. Possibility to make the device movable with an optional trolley. Delivered as standard with 2 sensors, a pair of gloves and a yoke for bore diameter greater than or equal to 115 mm. Other yoke sizes are available as an option and must be ordered according to the application.

COMMERCIAL REFERENCE

TOOL SMART TEMP XL (/ XL PIVOT) / induction heater

Very powerful induction heater for parts weighing up to **800 kg**, typically for heavy mechanical workshops (steelworks, paper mills, gear manufacturing, naval yards, etc.).



BENEFITS

- 400 V/63 A power supply.
- **High performance:** Designed for all bearings and rotating parts with a bore diameter over **40 mm**, with a maximum outside diameter of **1 500 mm** and a maximum weight of **800 kg** in a horizontal position.
- **Safe:** 4 heating modes: Time, Ramp, Temperature (1 sensor), Temperature (2 sensors).
- **Easy to use:** Interactive touch screen enabling precise control of the device (heating settings and graphics). Several languages available.
- **Extraction** of heating data (USB).
- **Ergonomic:** the yokes are positioned vertically and are equipped with a lifting ring. An optional lifting device simplifies handling.

Possibility to make the device movable with an optional trolley. Delivered as standard with 2 sensors, a pair of gloves, a yoke for bore diameter greater than or equal to 145 mm. Other yoke sizes are available as an option and must be ordered according to the application.

COMMERCIAL REFERENCE

TOOL SMART TEMP XXL / induction heater

MOUNTING & REMOVAL HOT

SmartTEMP XXXL

39

Extremely powerful induction heater for parts weighing up to **1 600 kg**.
Essential in machine shops of steelworks, paper mills and the rail and wind turbine sectors.



BENEFITS

- 400 V/100 A power supply.
- **High performance:** Designed for all bearings and rotating parts with a bore diameter over **85 mm**, with a maximum outside diameter of **2 000 mm** and a maximum weight of **1 600 kg** in a horizontal position.
- **Safe:** 4 heating modes: Time, Ramp, Temperature (1 sensor), Temperature (2 sensors).
- **Easy to use:** Interactive touch screen enabling precise control of the device (heating settings and graphics). Several languages available
- **Extraction** of heating data (USB).
- **Ergonomic:** the yokes are positioned vertically and are equipped with a lifting ring. An optional lifting device simplifies handling.

Delivered as standard with 2 sensors, a pair of gloves and a yoke for bore diameter greater than or equal to 215 mm. Other yoke sizes are available as an option and must be ordered according to the application.

COMMERCIAL REFERENCE

TOOL SMART TEMP XXXL / induction heater

ACCESSORIES



A lifting device is offered for use with the SmartTEMP XXL and XXXL.

Delivered as an option with the device, it is extremely useful in intensive applications and the handling of heavy yokes. Must be ordered at the same time as the heater and the trolley.

COMMERCIAL REFERENCE

TOOL ST/ (Size of the device) **LIFTING DEVICE**, e.g. **TOOL ST/XXL LIFTING DEVICE**



Trolleys may be used to make SmartTEMP XL, XL Pivot, XXL movable.

Adapted to each model and delivered as an option. Can be ordered separately for XL/ XL Pivot series. Trolley for XXL and XXXL has to be ordered at the same time as the heater.

COMMERCIAL REFERENCE

TOOL ST/(Size of the device) **TROLLEY**, e.g. **TOOL ST/XL TROLLEY**



Yokes and Extension yokes are available to meet the specific requirements related to the diameters of the part to be heated.

For each SmartTEMP model, a suitable set of yokes and extension yokes is available as an option.

COMMERCIAL REFERENCE

Yokes: TOOL ST/ (Size of the device) **YOKE** (Bore diameter capacity), e.g. **TOOL ST/XXL YOKE 60**
Extension yokes: TOOL ST/ (Size of the device) **EXTENSION YOKE** (extension height), e.g. **TOOL ST/L EXTENSION YOKE 150**

SPECIAL PRODUCTS



This device, especially developed for a wind turbine application, is capable of heating parts weighing up to 10 tonnes with an outside diameter of 4 metres to 120°C in 60 minutes.

NTN-SNR is able to design machines, specially adapted to your application.

The dimensions and performance of our induction heaters can be modified to match precisely the **geometry of your parts**, your **production rates** and the **electrical supply available** in your workshops.

Customised equipment can also be developed for your very large metal parts, used for wind turbine and railway applications.

We can provide you with an accurate quotation based on the following information:

- The weight of the part to be heated (min./max.)
- Dimensions of the part (min./max. bore, max. outside diameter, max. width)
- Electrical power and voltage available.
- Temperature to be achieved.
- Desired heating time or production pattern.

GOOD PRACTICES FOR MECHANICAL DISMOUNTING

Take care when dismantling: look after your equipment and save time, while working safely.

Note, the dismantling of bearings is a delicate operation, both for the operator and for the mechanical items involved.

If mounting requires a lot of know-how, the risks involved in dismantling cannot be ignored, even if the bearing is to be scrapped.

By opting for the correct methods and tools, you reduce the risk of personal injury and damaging parts (shaft, housing, even the bearing, if it is to be re-used).



The two main principles for dismantling are mechanical and hydraulic.

OUR RECOMMENDATIONS FOR MECHANICAL DISMOUNTING

Whenever possible; apply the withdrawal force to the ring with the interference fit.

There are numerous types of extractor, depending on the grip offered by the bearing, its accessibility and the extraction force required.

Extractors equipped with a pump and hydraulic cylinder allow the operator to develop very high extraction efforts, using their own muscular strength. They are easy to use, due to the fact that their arms are self-centering.

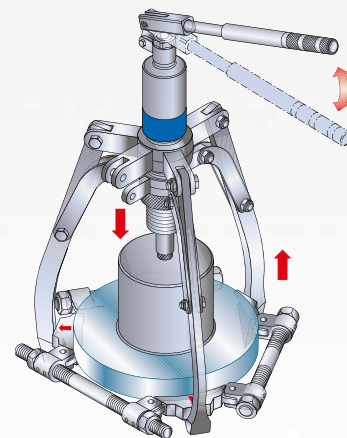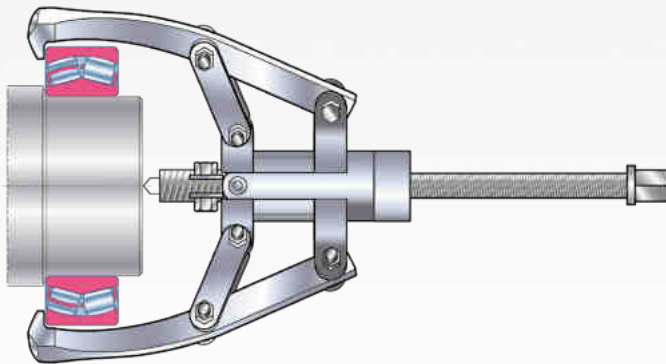

THE PROPER QUESTIONS TO BE ASKED

- How do I grip the part?
Selection of the type of grip: external, internal or special.
- What is the diameter of the part to be extracted?
Enables the span, spread and force to be defined.
- How do I pull on the part?
Choice of a support point: on the central shaft, on the outside of the part or using extraction accessories.

Puller kits for internal gripping of the bore. For quick and easy dismantling of bearings tightly mounted in a housing.



BP Set 5-44



BP Set 45-100



Slide hammer for BP Set 5-44



Clamp

APPLICATIONS

Ideal selection of high-strength extractors with braces for extraction via the bore:

- Bearing whose outer ring is a tight fit in its housing.
- Outer rings or rings with well locked packing.

ADVANTAGES

Practical

- The BP Set 5-44 has a thrust bolt fitted with a handle facilitating the grip for the hand, as well as a slide hammer.
- Each kit contains several pullers that adapt to each of your applications.
- The case for small bearings combines an adjustable counter support and a slide hammer offering you the choice of extraction mode.

Reliable and safe

- The unique design of adjustable puller blocks enables successful and safe dismantling, without risk of jacking over and without forces.
- Each part is made of high quality steel, robust and resistant to impact, ensuring product longevity.


Flexible

- BP Set 5-44 includes 7 pullers for extractions of 5 to 44 mm bore diameters.
- BP Set 45-100 includes 3 pullers for extractions of 45 to 100 mm bore diameters.

COMMERCIAL REFERENCE

TOOL BP Set 5-44 / Bore puller set

TOOL BP Set 45-100 / Bore puller set

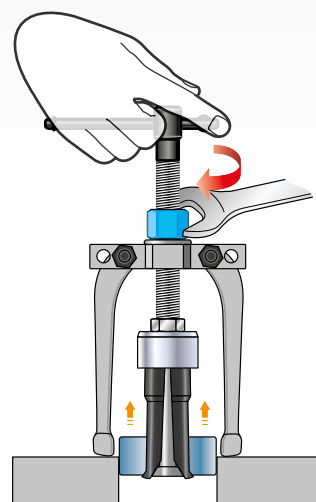

DEEP-GROOVE BALL BEARINGS PULLER KIT

For quick and easy extraction of your deep-groove ball bearings housed in blind bearings.

42



BBPS 10-100



Prong



Extraction ring

APPLICATIONS

This puller kit is specially adapted to carry out, without dismantling your machine, extractions of bearings that are difficult to access, such as:

- Bearings housed in blind bearings,
- Bearings installed on shafts,
- Bearings with a tight fit on outer or inner rings.

ADVANTAGES

Practical and easy

- The kit contains 3 o-rings to facilitate the assembly of your tool.
- The marking of parts along with the selection table included enables a quick selection of accessories to be used.
- The visual user guide favours the correct implementation of the tool.

Reliable and safe

- The design of tools enables successful and safe dismantling, without risk of jacking over and without forces.
- Each component is made of high quality steel, robust and resistant to impact, ensuring product longevity.

Flexible

- The case includes 3 different sizes of shafts and 28 puller arms providing a very wide range of applications.
- The kit enables extraction of bearings of 10 to 100 mm bore diameter.

COMMERCIAL REFERENCE

TOOL BBPS 10-100 / Ball bearing puller set



2/3 JAWS SELF-CENTERING MECHANICAL PULLER

43

A simple, robust and efficient range of pullers for an easy and safe dismounting of small or medium size bearings.



SCMP - 3 arms



SCMP - 2 arms



APPLICATIONS

Is also well suited to removing pulleys, toothed wheels, flywheels fixed to a shaft.

ADVANTAGES

Practical

- The self-centering mechanism ensures the simultaneous positioning of the puller's arms on the bearing.
- Compact and ergonomic, it may be easily operated in every position by one person.

Safe

- Self-locking system prevents the arms from bending or slipping.
- The greater the extraction force, the tighter the jaws grip the part.
- Robust, designed in hardened steel for maximum strength.



Multiple uses

- Quickly convertible to two or three claws, depending on the space available.
- Three available models for selection according to the outside diameter of the parts to be extracted and the required reach.

| Maximum spread (mm) | Maximum span (mm) | Capacity (tons) |
|---------------------|-------------------|-----------------|
| 120 | 80 | 2 |
| 180 | 120 | 3 |
| 270 | 160 | 5 |

COMMERCIAL REFERENCE

- TOOL SCMP 2/3-120 / Self-center mech puller
- TOOL SCMP 2/3-180 / Self-center mech puller
- TOOL SCMP 2/3-270 / Self-center mech puller

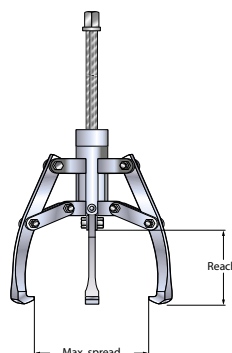

2/3 JAWS SELF-CENTERING HYDRAULIC PULLER

43

A range of powerful tools for very easy and risk-free dismantling of large bearings and press fitted parts such as pulleys and toothed wheels.

APPLICATIONS

The self-centering device facilitates positioning and anchoring around the bearing. The power developed by the hydraulic system allows the part to be extracted safely with very little effort.

ADVANTAGES

Practical

- Ready-to-use in a strong case. No assembly of the jaws required before use.
- Compact: the hydraulic pump is built-in. No need for a separate pump, hose or spindle.
- Ergonomic: pump handle pivoting through 360°, allowing the extractor to be used in the most comfortable position. Telescopic, it provides optimum transmission of the effort.
- Easy centering of the piston on the shaft with retractable, integrated point.
- A piston extension is supplied for use with a remote support surface.
- A piston return device makes it immediately ready for further use.
- Long stroke of hydraulic spindle facilitates dismantling in one operation.

Multiple uses

- Possibility to change between two or three jaws, depending on the accessibility of the bearing.
- Available in four versions, depending on the power and size required: 4, 12, 20 and 30 tons.

| Capacity (tons) | Maximum spread (mm) | Maximum span (mm) | Cylinder stroke (mm) |
|-----------------|---------------------|-------------------|----------------------|
| 4 | 325 | 190 | 60 |
| 12 | 485 | 305 | 85 |
| 20 | 570 | 365 | 111 |
| 30 | 680 | 465 | 111 |

- For the 4 and 12-ton capacity, an accessory kit consisting of a puller block, connecting rods and a set of bearings separators increases the number of uses and makes separation easier.

Safe

- A safety relief valve prevents any risk of overloading and limits the force applied to the maximum capacity of the equipment.
- A cover protects the user from possible flying bearing fragments. Made of transparent material, it provides good visibility for controlling the extraction.
- The 20 and 30-ton model is equipped with an innovative two-stage pump which makes operation easier and safer.

COMMERCIAL REFERENCE

TOOL SCHK 4 TONS / Self-center hyd puller
 TOOL SCHK 12 TONS / Self-center hyd puller
 TOOL SCHK 20 TONS / Self-center hyd puller
 TOOL SCHK 30 TONS / Self-center hyd puller



SCHK 4T - 3 arms



SCHK 4T - 2 arms

ACCESSORY CASES FOR 4 AND 12-TON SCHP

A strong grip for a safe and easy dismantling.

44



AS-SCHP 12T

APPLICATIONS

A separator is a complementary tool to a claw extractor when the latter does not have sufficient grip. A perfect grip on the back of parts, using bevelled blades, reduces the force necessary for dismantling and avoids damaging the shaft's contact surface

ADVANTAGES

- Robust design ensuring a long life for the separation blades.
- After separation by tightening the two blades, turning the separator enables greater force to be used without deforming the blades for the complete extraction of the part.
- Extensions are included to compensate for the distance of the support face.
- Easy centering of the piston on the shaft with integrated point.
- Two versions are available depending on the required power: 4 and 12 tons.

COMMERCIAL REFERENCE

TOOL AS-SCHP 4T / acc set hyd puller
TOOL AS-SCHP 12T / acc set hyd puller



AS-SCHP 4T

UNIVERSAL, TRI-SECTION PULLING PLATE

A strong grip for safe and effective dismounting using a mechanical or hydraulic puller.

▶ 44



APPLICATIONS


The tri-section pulling plate is the complementary tool to the three-armed pullers when the latter does not have sufficient grip. Universal, it is suitable for both the SCHK hydraulic extractor and the SCMP mechanical model.

ADVANTAGES

- The blades are placed behind the bearing, where the extraction force is most effective.
- The application of the effort on the inner ring minimises the risk of damaging the bearing while preserving the rolling body and the outer ring.
- The tri-section construction distributes the extraction force evenly, preventing the bearing from locking and/or tilting on the shaft during dismounting.

COMMERCIAL REFERENCE

TOOL BP3S 26-160 / Tri-section back puller
TOOL BP3S 50-210 / Tri-section back puller
TOOL BP3S 90-340 / Tri-section back puller
TOOL BP3S 140-495 / Tri-section back puller



PULLER-SEPARATOR KIT

45

For easy and risk-free removal of rings or complete bearings mounted on a shaft and difficult to grasp.

Adjustable arms, provided in the kit, also enable extractions by internal or external gripping.



APPLICATIONS

Allows the extraction of all parts mounted onto a shaft by force, such as pulleys, handwheels and sprockets. In order to adapt to your various applications, the adjustable arms will also enable you to dismount:

- Bearings or rings mounted on the shaft (external gripping),
- Bearings or rings jammed in a housing (internal gripping).

ADVANTAGES

2-in-1 tool

- Each case contains a puller block that allows the mounting of the tool for separations as well as extractions.
- The removable arms will allow you to carry out extractions by internal or external gripping.
- A separator for your parts installed on the shaft, as well as a set of removable arms for internal or external gripping, all contained in a single case.

Powerful and reliable

- The separator is equipped with bevelled blades that ensure excellent grip and thereby avoid any locking.
- With a power of 100 kN, BPES guarantees safe extractions without any degradation to your environment.
- The separator as well as the puller are made of very high quality steel, ensuring the resistance and longevity of your kit.

Practical

- Thanks to its unique design, BPES 10-105 covers a wide range of applications.
- The kit contains 2 extensions for applications requiring a long span.

COMMERCIAL REFERENCE

TOOL BPES 10-105/Back puller extract set



Extraction with separator



External grasping extraction

HYDRAULIC PULLER FOR MOUNTING AND DISMOUNTING

Practical and safe 3-in-1 tool, for mounting and dismounting of bearings and sleeves by internal or external grasping.

45



APPLICATIONS

Ideal tool for mounting and dismounting a large variety of mounting parts, including bushings, bearings, wheels, gears and pulleys.

The kit, supplied in a steel case, includes:

- An internal gripping puller,
- A double-acting hydraulic cylinder: 8 tons for thrust and 12 tons for extraction,
- 3 arms as well as 3 extensions.

ADVANTAGES

Quick and practical

- 3-in-1 tool for a reduced preparation time: same tool used for mounting and dismounting of bearings.
- The single double-acting cylinder ensures a thrust force of 8 tons as well as an extraction of 12 tons.
- Included extensions can be used to attain a greater range.

Longevity

- A built-in safety valve enables the tool to operate below rated pressure in order to preserve it over time.

Safety

- The built-in safety valve prevents all injuries to the user and all damage to the working environment.
- A self-centering design avoids risk of slipping of the arm during the extraction operation by internal gripping.

COMMERCIAL REFERENCE

TOOL PUSH/PULLER 8/12 Tons



Internal gripping



Extraction



Thrust

MOUNTING & REMOVAL HYDRAULIC

THE GOOD PRACTICES FOR HYDRAULIC MOUNTING AND DISMOUNTING



HYDRAULIC MOUNTING

The mounting of large bearings with tapered bores requires considerable effort that is difficult to produce by mechanical screw tightening. The use of hydraulic technology is required in such cases.



A preliminary solution consists in injecting an oil film over the entire contact area between the shaft and the inner ring. Another solution consists in using a hydraulic nut to develop the necessary mounting force. The two principles may also be used simultaneously to make mounting easier. The residual clearance is checked using feeler gauges or a dial gauge is used to measure the displacement of the bearing along the tapered seat.

Two types of mounting lend themselves to this method:

TAPERED SEAT SHAFT

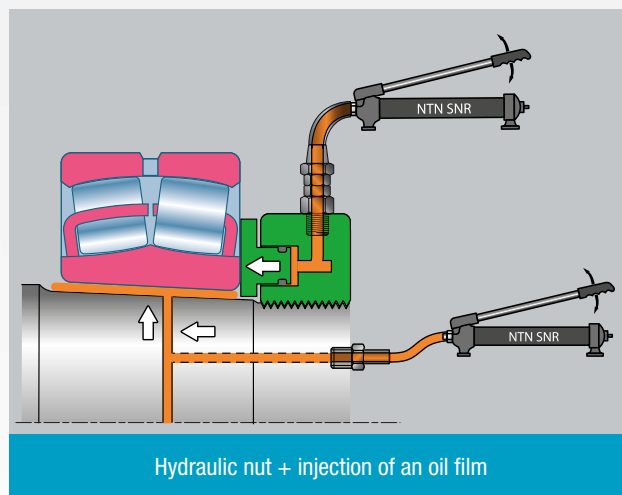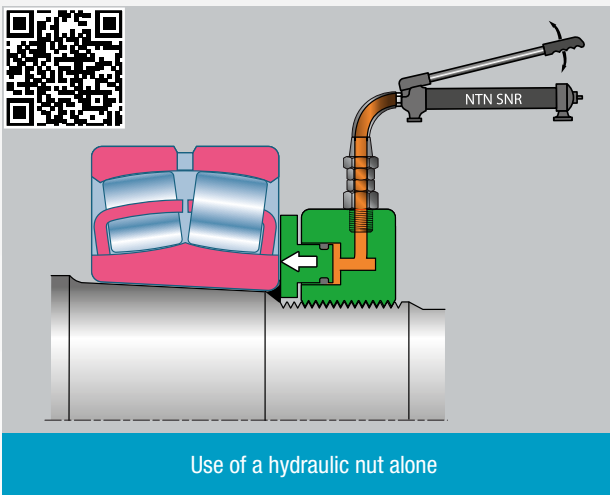


SHAFTS WITH A CYLINDRICAL CONTACT SURFACE IN ASSOCIATION WITH A SLEEVE

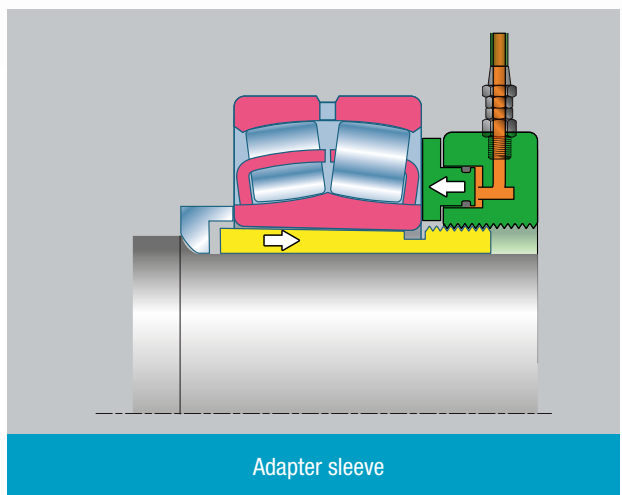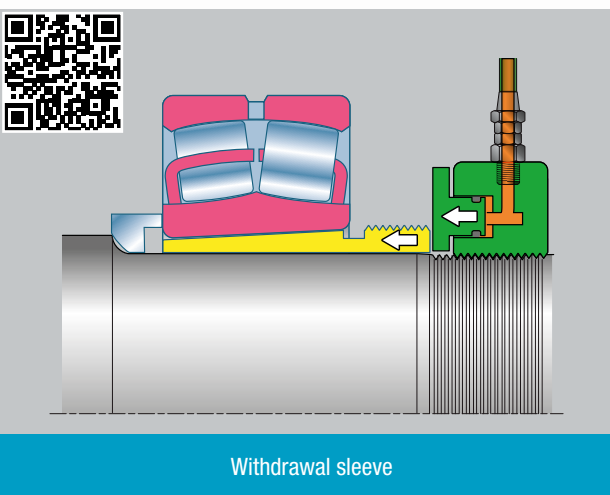


HYDRAULIC DISMOUNTING


- ▶ If an adapter or withdrawal sleeve was used during mounting, a hydraulic nut can be used for quick and effortless dismounting.
- ▶ If hydraulic channels were originally provided in the shaft, the injection of a film of oil on the contact surface between the shaft and the inner ring greatly reduces the effort required.

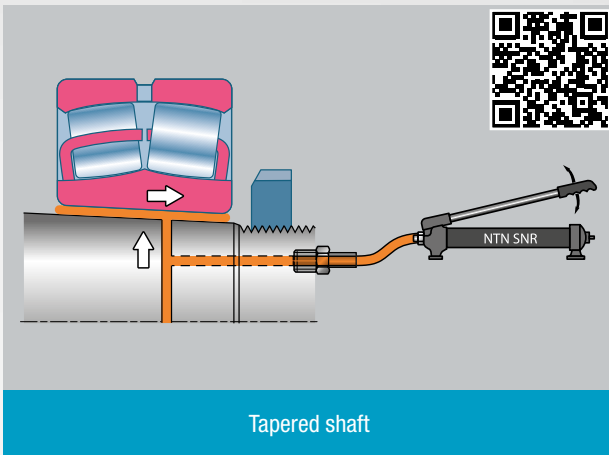


Tapered shaft

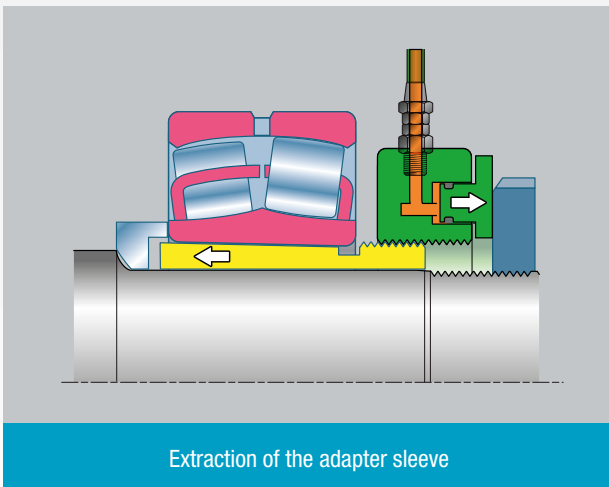


Extraction of the adapter sleeve

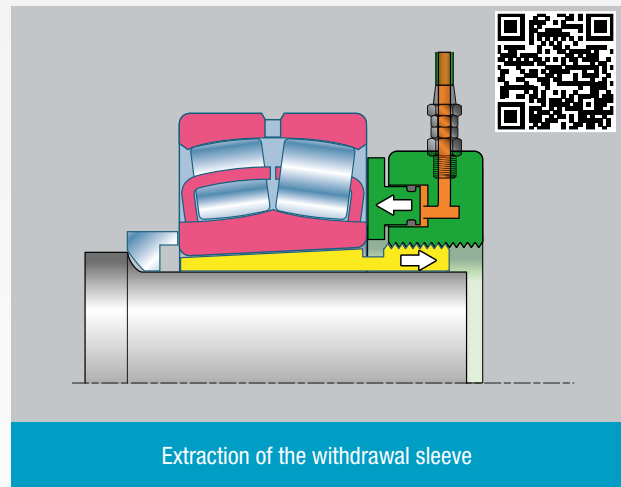

Extraction of the withdrawal sleeve

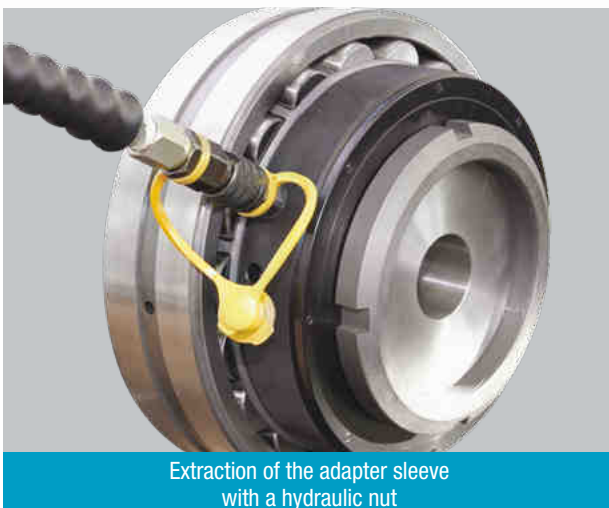

Extraction of the adapter sleeve with a hydraulic nut

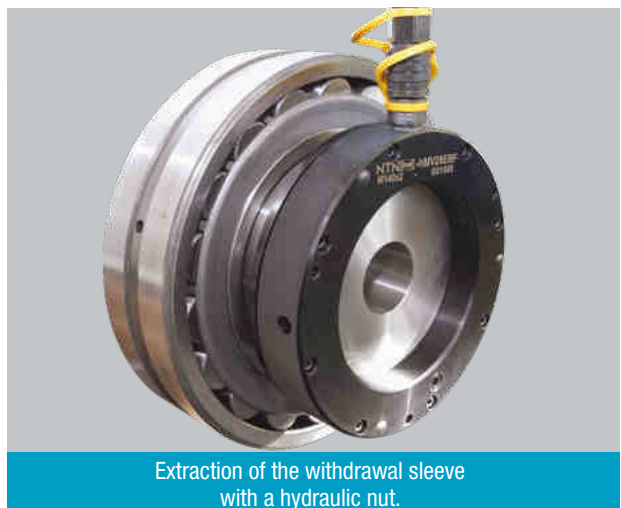

Extraction of the withdrawal sleeve with a hydraulic nut

Precise, effortless mounting of your large bearings with a tool that is always ready for use.

APPLICATIONS

Beyond a certain shaft diameter, the mounting or dismounting of a bearing on tapered seatings requires hydraulic assistance.

A hydraulic nut ensures perfect control of the adjustment of the assembly while limiting the use of manual force and reducing the time taken for the operation.

ADVANTAGES

Besides the hydraulic principle, the **“back and forth”** design provides unique ease of operation with the automatic return of the thrust plate to its initial position (**design patented by NTN-SNR**)

“No need to retract the piston manually. This operation is often tedious and subject to oil leaks: the NTN-SNR nut is automatically ready for a new use.”

- Wide range of sizes: for shafts from 50 mm to 1000 mm in diameter.
- Range also available in standard inch dimensions HMVC from 1,967 to 37,410 inches.
- Special sizes on request.
- Set of spare piston seals supplied as standard.
- The hydraulic nut is equipped with:
 - Two hydraulic connection points, with spot facing for perfect sealing,
 - One quick coupling connection (male) which can be positioned on the front face or on the outside diameter, depending on the ease of access.
(The 1500 bar high pressure provides maximum safety with a locking stop),
 - One 1500 bar ball valve,
 - 3 holes in the front face are provided for mounting the dial gauge (not included).
- The surface treatment of the nuts provides excellent protection against corrosion and ensures a long working life.
- Easier handling and nut screwing due to:
 - The knurling of the outer surface,
 - A bar being supplied and the provision of 4 holes on the outer diameter. (For sizes \geq HMV 50 EBF).
- Easy handling with eye bolts for nut sizes HMV 60 EBF and upwards supplied.

COMMERCIAL REFERENCE

TOOL HMV (size) EBF / Hydraulic nut (metric)

TOOL HMVC (size) EBF / Hydraulic nut (inches)

OPTIONAL ACCESSORIES

- Dial gauge for the measurement of the displacement of the piston from 5 to 10mm

COMMERCIAL REFERENCE

- TOOL DIAL GAUGE 50
- TOOL DIAL GAUGE 100

- Adaptor kit for the dial gauge

COMMERCIAL REFERENCE

- TOOL DIAL EXTENSION SET



Tool Dial gauge 50



Tool Dial extension set

MANUAL HYDRAULIC PUMP KITS

50

A two-stage, high-pressure, ultra-light hand pump, 700 bar (70 MPa) 0.3 L and 0.9 L with 2 stages.



TOOL PUMP SET 700B

APPLICATIONS

These high-pressure pumps are designed for use with automatic return hydraulic nuts or for the mounting and dismounting of bearings coated with an oil film.

Pumps are supplied as standard with the following accessories designed for use at 700 bar:

- 1 pressure gauge, minimising the risk of overloading,
- 1 high-quality hose (1.5 m for the 700 bar pump with a 0.3 litre reservoir, 3m for the 700 bar pump with a 0.9 litre reservoir),
- 1 quick coupling connection (female) suitable for NTN-SNR hydraulic nuts,
- They are supplied filled with hydraulic oil.

ADVANTAGES

- Ultra-light, compact design.
- Robust reservoir in composite materials.
- Ergonomic: locking of the lever to facilitate transport.
- Robust: pump guaranteed for life under normal conditions of use.
- Efficient: savings in time and effort due to the two stages which allow a reduction of 80% in the number of pump strokes required in comparison with single-stage pumps.
- User safety: electrically isolated lever and safety relief valve.
- Multiple uses: 3 available reservoir sizes:
 - 0.3 litre for nuts \leq HMV 54 EBF,
 - 0.9 litre for nuts \leq HMV 92 EBF,
 - For sizes $>$ HMV 92 EBF, contact us.

Accessories included for 700 bar pump

- Pressure gauge adaptor for pumps 750b 0.3L and 0.9L.
- Pressure gauge (0-700 bar) or (0-1500 bar)
 - Liquid filled to protect against any sudden loss of pressure,
 - Dual markings in bars / PSI,
 - Fitted with a device protecting against bursting.
- Hose 700 bar
 - Very strong thermoplastic, reinforced with layers of woven steel wire,
 - Polyurethane envelope for extreme abrasion resistance,
 - With a rubber protective "handle".
- Quick coupling protection (female) 1500 bars, which provides maximum safety with end stop locking and optimum sealing with a flat face valve.

Technical characteristics of the hydraulic oil

Contains corrosion inhibitors which do not attack sealing materials such as nitrile.

Relative density at 15°C: 0.870 kg/dm³

Viscosity at 40°C: 31 cSt

Viscosity index: 102

Flash point: 230°C

Freezing point: -36°C

COMMERCIAL REFERENCE

TOOL PUMP SET 700B - (reservoir capacity) I / Pump with accessories
TOOL HYDRAULIC OIL 1 L



TOOL HYDRAULIC OIL 1L

EXTENSION TUBES AND THEIR ADAPTORS

In order to allow pressurised oil injection into a sleeve or a shaft with a thick wall, NTN-SNR proposes a range of extension tubes with adaptors, thus enabling to facilitate the extraction of a bearing.

- Maximum pressure = 1500b for greater safety.
- Stainless steel tubes for very high resistance.



Pipe



Pipe

Several sizes available. It can be connected directly to the sleeve.



Adaptor

To be selected according to the extension tube diameter. It enables to connect the tube to the hydraulic connection (not supplied with the adaptor).



Adaptor



Connection

It is screwed onto the adaptor (G1/4) and can be directly used with our pump kits, TOOL PUMP set 700b and 1500b.




Connection


Sizes and references

| Sleeve threading | Pipe | Adaptor | Connection |
|--------------------------|----------------------------------|-------------------------------------|------------------------|
| M4 (diagram 1) | TOOL EXTENSION PIPE M4 50 MPA | TOOL CONNECTING NIPPLE M4 150 MPA | TOOL HMV NIPPLE 1/4 |
| M6 (diagram 2) | TOOL EXTENSION PIPE M6 150 MPA | TOOL CONNECTING NIPPLE M6 150 MPA | |
| G 1/8 (diagram 3) | TOOL EXTENSION PIPE G1/8 150 MPA | TOOL CONNECTING NIPPLE G1/8 150 MPA | |
| G 1/4 (diagram 4) | TOOL EXTENSION PIPE G1/4 150 MPA | TOOL CONNECTING NIPPLE G1/4 150 MPA | |


(diagram 1)

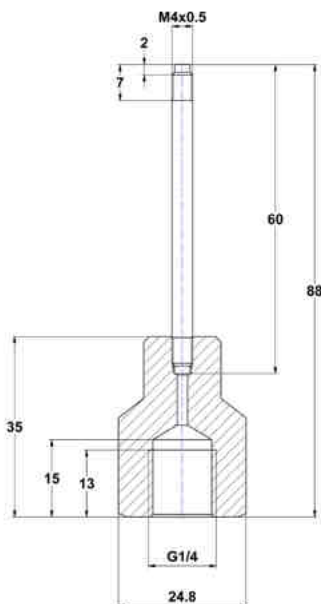


(diagram 2)

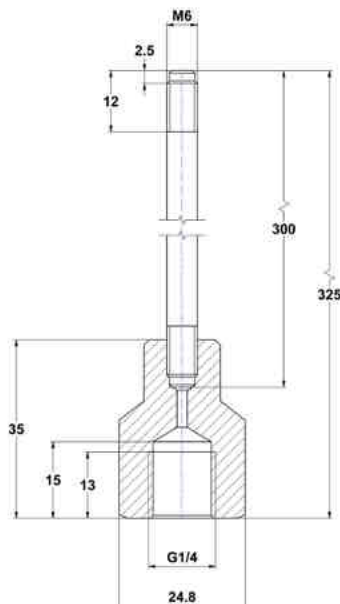

(diagram 3)

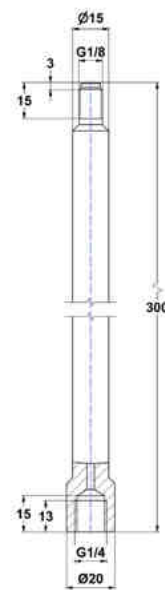

(diagram 4)

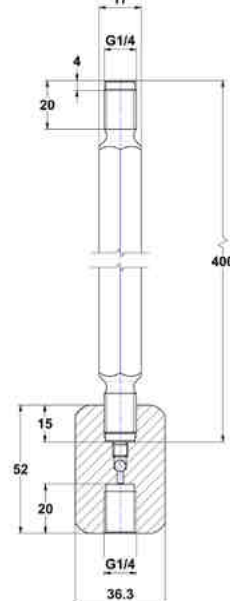



CONTENTS

SAFETY & MEASUREMENT

P. 32 SAFETY INSTRUMENT

- Heat-resistant gloves 32

P. 32 MEASUREMENT INSTRUMENTS

- Set of calibrated feeler gauges 32
- Infra-red thermometer with laser targeting 33

SAFETY & MEASUREMENT

SAFETY INSTRUMENT

HEAT-RESISTANT GLOVES

Protective gloves to safely handle oily and hot parts of up to +350° C.

52



ADVANTAGES

- Made of KEVLAR, they are extremely resistant to tearing, abrasion and cuts.
- Non-inflammable: they provide a high level of protection against contact and convective heat.
- They are tested and certified for mechanical (EN 388) and thermal (EN407) hazards.
- Non-fluffy, they avoid polluting the bearings.
- Extremely comfortable, they are useful for all maintenance work.
- Single size: 10.5.

COMMERCIAL REFERENCE

TOOL GLOVE HEAT RESISTANT

MEASUREMENT INSTRUMENTS

SET OF CALIBRATED FEELER GAUGES

A simple and precise tool for measuring the clearance between two parts.

52



APPLICATIONS

This feeler gauge set allows the quick, accurate measurement of radial clearance, especially on spherical roller and cylindrical bearings. It contains 17 gauges.


3 versions of the gauge set are offered: 100mm, 150mm and 300 mm long.

ADVANTAGES

- Set of 17 round end gauges.
- Delivered with a spare set of the thinnest gauge blades.
- Available in 100 mm, 150 mm and 300 mm.
- In a protective steel sleeve.
- Calibrated to 1/100th.

COMMERCIAL REFERENCE

FEELER GAUGE TOOL (gauge length)

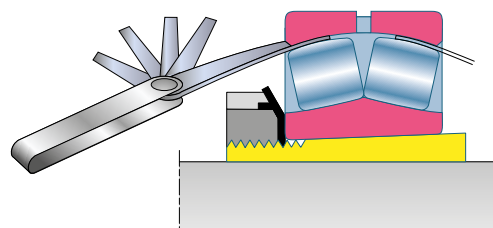

LASER TEMP 301 INFRA-RED THERMOMETER WITH LASER TARGETING

53



Enabling a preliminary diagnosis of the machine operation by means of accurate and safe measurement of the temperature remotely or by contact.

APPLICATIONS

The LASER TEMP 301 thermometer combines safety with accuracy.

- The safety of remote infrared measurement for burning, moving or difficult-to-access objects.
- Accurate measurement using the contact probe.

Its elaborate optical system allows small, remote targets to be measured easily and precisely.

ADVANTAGES



- Wide measurement range in infrared mode: -50°C to $+850^{\circ}\text{C}$.
- High degree of precision, using the:
 - Laser targeting device,
 - The excellent 30:1 distance:target ratio,
 - Emissivity adjustable between 0.1 and 1,
 - Type K thermocouple wire probe.
- Extremely quick measurements: response time less than 1 second.
- Internal memory able to record up to 20 measurements.
- Equipped with the following functions:
 - High / low, visual and audible adjustable alarms,
 - Automatic switch-off to maximise its useful life,
 - Maximum, minimum, difference, average measurement.
- Light, ergonomic gun shape.
- Simple to use, it may be easily configured to work in $^{\circ}\text{C}$ or $^{\circ}\text{F}$.
- Back-lit display for easy reading.


Supplied with:

- Type K thermocouple wire probe (range -50°C to $+440^{\circ}\text{C}$, length 1 m),
- Protective pouch - User manual.

COMMERCIAL REFERENCE

TOOL LASERTEMP 301 / IR Thermometer

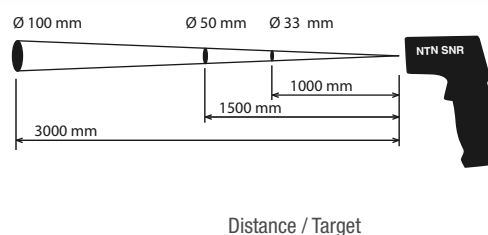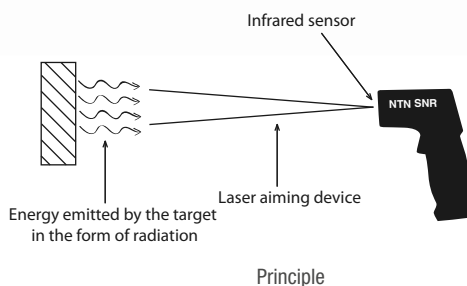

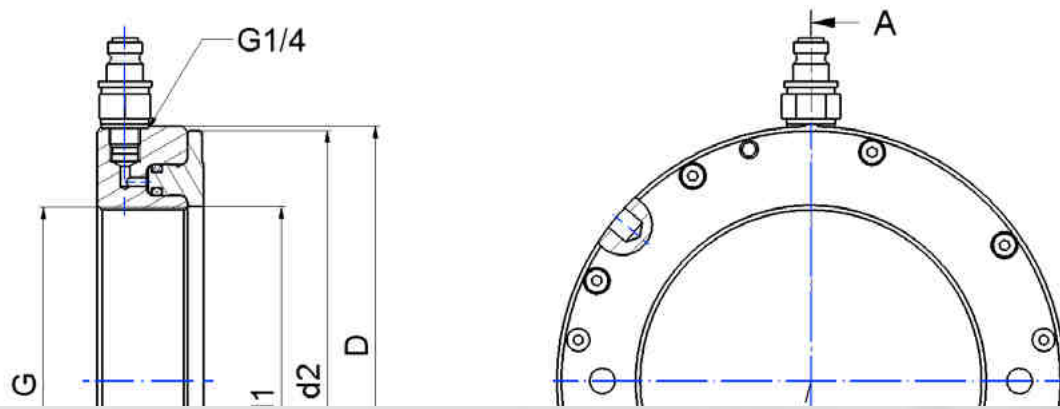

CONTENTS

TECHNICAL DATA

| | |
|---|----|
| • Mounting tool kit case | 36 |
| • Anti-fretting paste | 36 |
| • Adjustable spanners | 36 |
| • Heating equipment | 38 |
| • Bore puller kits | 41 |
| • Deep-groove ball bearings extractor kit | 42 |
| • Self-centering mechanical puller | 43 |
| • Self-centering hydraulic puller | 43 |
| • Accessory cases | 44 |
| • Tri-section pulling plate | 44 |
| • Puller - separator kit | 45 |
| • Hydraulic puller for mounting and dismounting | 45 |
| • Hydraulic nuts | 46 |
| • Manual hydraulic pump kits | 50 |
| • Heat-resistant gloves | 52 |
| • Set of calibrated feeler gauges | 52 |
| • Infra-red thermometer with laser targeting | 53 |

TECHNICAL DATA

| COLD MOUNTING TOOL KIT CASE ▶ P 9 | |
|--|--|
| Reference | TOOL IFT SET 33 / Industry Fitting Tool Set |
| Description | Mounting tool kit |
| Application | Cold mounting of bearings: bore Ø: 10 to 50 mm outside Ø: 26 to 110 mm |
| Contents | 33 Impact rings 3 Mounting sleeves 1 Dead-blow mallet (weight 0.7 kg) |
| Material | Socket machined from strong, solid material |
| Case dimensions | 430 x 320 x 100 mm |
| Weight of kit, including case | 4.8 kg |

| ANTI-FRETTING PASTE B 500G / T 60G ▶ P 11 | |
|--|---------------------------|
| References | LUB MOUNTING PASTE |
| Density | 0.910 |
| Colour | Brown |
| Texture | Smooth |
| Nature of thickener | Aluminium complex |
| NLGI consistency | 1.5 |
| Temperature range for use | -30°C to +145°C |
| Drop point NF T 60102C | > 240°C |
| Packaging | Tube 60 g – box 500 g |

| ADJUSTABLE SPANNERS ▶ P 11 | | |
|---|--|-------------------|
| Reference | TOOL PS (size) / Pin spanner | |
| Description | Articulated manual pin spanner | |
| Material | Hardened, forged chrome vanadium steel. Satin chrome finish | |
| Pin hardness | 40 HRC | |
| Use | Tommy nuts (examples of accuracy: TB, TBR, TBP, TBPR, etc.) | |
| References | Nut diameter (mm) | Pin diameter (mm) |
| TOOL PS 15-35 | 15-35 | 3 |
| TOOL PS 35-50 | 35-50 | 4 |
| TOOL PS 50-80 | 50-80 | 5 |
| TOOL PS 80-120 | 80-120 | 6 |
| TOOL PS 120-180 | 120-180 | 8 |

| | | |
|-----------------|--|--|
| References | TOOL HS (size) / Hook spanner | |
| Description | Articulated manual hook spanner | |
| Material | Hardened, forged chrome vanadium steel. Satin chrome finish | |
| Use | Slot nuts (e.g.: KM, KML, ..., B, BR, BP, ...) | |
| References | Nut diameter (mm) | |
| TOOL HS 15-35 | 15-35 | |
| TOOL HS 35-50 | 35-50 | |
| TOOL HS 50-80 | 50-80 | |
| TOOL HS 80-120 | 80-120 | |
| TOOL HS 120-180 | 120-180 | |

| PRECISION NUT CROSS REFERENCE/tommy nut and slot nut spanners | | | | | | | | | | |
|---|--------|--------------------|------------|--------------------|--------|---------------------|--------|----------------------|---------|----------|
| Spanner 15-35 (mm) | | Spanner 35-50 (mm) | | Spanner 50-80 (mm) | | Spanner 80-120 (mm) | | Spanner 120-180 (mm) | | |
| Hook | Pin | Hook | Pin | Hook | Pin | Hook | Pin | Hook | Pin | |
| B and TB nuts | B 20/1 | B 20/1 | B 25 | TB 25 | B 35 | TB 35 | B 60 | TB 60 | B 90 | TB 90 |
| | TB 90 | B 20/1.5 | B 30 | TB 30 | B 40 | TB 40 | B 65 | TB 65 | B 95 | TB 95 |
| | - | - | - | - | B 45 | TB 45 | B 70 | TB 70 | B 100 | TB 100 |
| | - | - | - | - | B 50 | TB 50 | B 75 | TB 75 | - | - |
| | - | - | - | - | B 55 | TB 55 | B 80 | TB 80 | - | - |
| | - | - | - | - | B 60 | TB 60 | B 85 | TB 85 | - | - |
| | - | - | - | - | - | - | B 90 | TB 90 | - | - |
| BP and TBP nuts | - | - | BP 20/1 | TBP 20/1 | BP 30 | TBP 30 | BP 55 | TBP 55 | BP 75 | TBP 75 |
| | - | - | BP 20/1.5 | TBP 20/1.5 | BP 35 | TBP 35 | BP 60 | TBP 60 | BP 80 | TBP 80 |
| | - | - | BP 25 | TBP 25 | BP 40 | TBP 40 | BP 65 | TBP 65 | BP 85 | TBP 85 |
| | - | - | - | - | BP 45 | TBP 45 | BP 70 | TBP 70 | BP 90 | TBP 90 |
| | - | - | - | - | BP 50 | TBP 50 | - | - | BP 95 | TBP 95 |
| | - | - | - | - | - | - | - | - | BP 100 | TBP 100 |
| BR and TBR nuts | - | - | BR 25 | TBR 25 | BR 35 | TBR 35 | BR 60 | TBR 60 | BR 90 | TBR 90 |
| | - | - | BR 30 | TBR 30 | BR 40 | TBR 40 | BR 65 | TBR 65 | BR 95 | TBR 95 |
| | - | - | - | - | BR 45 | TBR 45 | BR 70 | TBR 70 | BR 100 | TBR 100 |
| | - | - | - | - | BR 50 | TBR 50 | BR 75 | TBR 75 | - | - |
| | - | - | - | - | BR 55 | TBR 55 | BR 80 | TBR 80 | - | - |
| | - | - | - | - | BR 60 | TBR 60 | BR 85 | TBR 85 | - | - |
| | - | - | - | - | - | - | BR 90 | TBR 90 | - | - |
| BPR and TBPR nuts | - | - | BPR 20/1 | TBPR 20/1 | BPR 30 | TBPR 30 | BPR 55 | TBPR 55 | BPR 75 | TBPR 75 |
| | - | - | BPR 20/1.5 | TBPR 20/1.5 | BPR 35 | TBPR 35 | BPR 60 | TBPR 60 | BPR 80 | TBPR 80 |
| | - | - | BPR 25 | TBPR 25 | BPR 40 | TBPR 40 | BPR 65 | TBPR 65 | BPR 85 | TBPR 85 |
| | - | - | - | - | BPR 45 | TBPR 45 | BPR 70 | TBPR 70 | BPR 90 | TBPR 90 |
| | - | - | - | - | BPR 50 | TBPR 50 | - | - | BPR 95 | TBPR 95 |
| | - | - | - | - | - | - | - | - | BPR 100 | TBPR 100 |

| KM NUT CROSS REFERENCE/pin tightening spanner | | | | |
|---|--------------------|--------------------|---------------------|----------------------|
| Spanner 15-35 (mm) | Spanner 35-50 (mm) | Spanner 50-80 (mm) | Spanner 80-120 (mm) | Spanner 120-180 (mm) |
| TOOL HS 15-35 | TOOL HS 35-50 | TOOL HS 50-80 | TOOL HS 80-120 | TOOL HS 120-180 |
| KM 0 | KM 5 | KM 7 | KM 12 | KM 18 |
| KM 1 | KM 6 | KM 8 | KM 13 | KM 19 |
| KM 2 | - | KM 9 | KM 14 | KM 20 |
| KM 3 | - | KM 10 | KM 15 | KM 21 |
| KM 4 | - | KM 11 | KM 16 | KM 22 |
| - | - | KM 12 | KM 17 | KM 23 |
| - | - | - | KM 18 | KML 24 |
| - | - | - | - | KM 24 |
| - | - | - | - | KM 25 |
| - | - | - | - | KML 26 |
| - | - | - | - | KML 27 |
| - | - | - | - | KML 28 |
| - | - | - | - | KML 28 |
| - | - | - | - | - |


TECHNICAL DATA

HEATING APPARATUS - TOOL SmartTEMP (SIZE) / INDUCTION HEATER

> P 14/15

| TECHNICAL DATA | SmartTEMP S | SmartTEMP M | SmartTEMP L | SmartTEMP XL / XL Pivot |
|--|------------------------------------|-------------------------------------|---------------------------------|---|
| ELECTRICITY | | | | |
| Maximum power consumption | 3 kVA | 3,7 kVA | 8 kVA | 12,8 kVA |
| Maximum voltage/current | 230 V / 13 A | 230 V / 16 A | 400 V / 20 A | 400 V / 32 A |
| Frequency | 50 Hz | 50 Hz | 50 Hz | 50 Hz |
| Other voltages on request | 110 V - 240 V | 110 V - 240 V | 480 V - 575 V | 480 V - 575 V |
| Other frequencies on request | 60 Hz | 60 Hz | 60 Hz | 60 Hz |
| CONTROL | | | | |
| Temperature adjustment | +40°C à +240°C (+400°C opt.) | +40°C à +240°C (+400°C opt.) | +40°C à +240°C (+400°C opt.) | +40°C à +240°C (+400°C opt.) |
| Heating time adjustment | 0-99 hours | 0-99 hours | 0-99 hours | 0-99 hours |
| Maximum temperature | +240°C | +240°C | +240°C | +240°C |
| Δ Temperature | 20-50°C | 20-50°C | 20-50°C | 20-50°C |
| Temperature probe Reference: Tool + | 1 (2 in option) TEMP PROBE 400* | 1 (2 in option) TEMP PROBE 1000* | 2 TEMP PROBE 1000* | 2 TEMP PROBE 1000* |
| Heating modes - Time - Ramp - Temp. with 1 sensor - Temp. with 2 sensors | • | • | • | • |
| Temperature control precision | +/-2°C | +/-2°C | +/-2°C | +/-2°C |
| Temperature holding at the end of cycle | • | • | • | • |
| Demagnetising | Automatic | Automatic | Automatic | Automatic |
| Residual magnetism | < 2 A / cm | < 2 A / cm | < 2 A / cm | < 2 A / cm |
| Audible signal | • | • | • | • |
| APPLIANCE DESIGN | | | | |
| Dimensions (L x W x H) (mm) | 450 x 210 x 275 | 540 x 275 x 365 | 695 x 330 x 475 | 850 x 410 x 1050 |
| Space between pivots A and B (1) | 120 x 145 mm | 180 x 180 mm | 210 x 215 mm | 300 x 324 mm / 330 x 300 mm (XL Pivot) |
| Weight (without yoke) | 21 kg | 40 kg | 85 kg | 157 kg |
| Pivoting arm | no | • | • | • (XL Pivot) |
| Trolley (optional) | no | no | no | • |
| PARTS TO BE HEATED | | | | |
| Maximum weight | 50 kg | 100 kg | 200 kg | 400 kg |
| Minimum bore diameter with smallest yoke. | 10 mm | 10 mm | 20 mm | 30 mm |
| Maximum external diameter | 400 mm | 500 mm | 600 mm | 1000 mm |
| Maximum width | 140 mm | 180 mm | 210 mm | 315 mm / 320 mm (XL Pivot) |


* length of probe wire (e.g. 400: 400 = 400 mm)



HEATING APPARATUS - TOOL SmartTEMP (SIZE) / INDUCTION HEATER
> P 15/16

| TECHNICAL DATA | SmartTEMP XXL | SmartTEMP XXXL |
|--|---------------------------------|---------------------------------|
| ELECTRICITY | | |
| Maximum power consumption | 25,2 kVA | 40 kVA |
| Maximum voltage/current | 400 V / 63 A | 400 V / 100 A |
| Frequency | 50 Hz | 50 Hz |
| Other voltages on request | 480 V - 575 V | 480 V - 575 V |
| Other frequencies on request | 60 Hz | 60 Hz |
| CONTROL | | |
| Temperature adjustment | +40°C à +240°C (+400°C opt.) | +40°C à +240°C (+400°C opt.) |
| Heating time adjustment | 0-99 hours | 0-99 hours |
| Maximum temperature | +240°C | +240°C |
| Δ Temperature | 20-50°C | 20-50°C |
| Temperature probe | 2 | 2 |
| Reference: Tool + | TEMP PROBE 1000* | TEMP PROBE 1500* |
| Heating modes - Time - Ramp - Temp. with 1 sensor - Temp. with 2 sensors | • | • |
| Temperature control precision | +/-2°C | +/-2°C |
| Temperature holding at the end of cycle | • | • |
| Demagnetising | Automatic | Automatic |
| Residual magnetism | < 2 A / cm | < 2 A / cm |
| Audible signal | • | • |
| APPLIANCE DESIGN | | |
| Dimensions (L x W x H) (mm) | 1080 x 500 x 1350 | 1500 x 800 x 1600 |
| Space between pivots A and B (1) | 435 x 495 mm | 685 x 705 mm |
| Weight (without yoke) | 280 kg | 650 kg |
| Pivoting arm | no | no |
| Trolley (optional) | • | • |
| PARTS TO BE HEATED | | |
| Maximum weight | 800 kg | 1600 kg |
| Minimum bore diameter with smallest yoke. | 40 mm | 85 mm |
| Maximum external diameter | 1500 mm | 2000 mm |
| Maximum width | 485 mm | 695 mm |

* length of probe wire (e.g. 400: 400 = 400 mm)



TECHNICAL DATA

| YOKES AND OPTIONAL EQUIPMENT | | | | | | | > P 14/16 |
|--|---|-----------------------------|------------------------------|---------------------------------------|----------------------------------|------------------------------------|---|
| TECHNICAL DATA | SmartTEMP S | SmartTEMP M | SmartTEMP L | SmartTEMP XL / XL Pivot | SmartTEMP XXL | SmartTEMP XXXL | |
| DIMENSIONS (mm) STANDARD YOKES (●) AND OPTIONAL (○) | | | | | | | Pivoting yoke |
| ∅ Bore diameter of part to be heated | References: TOOL ST/ (Size of the device) YOKE (Bore diameter capacity), e.g. TOOL ST/S YOKE 10 | | | | | | |
| 10 mm | ○ ST/S YOKE 10 7x7x200 | ○ ST/M YOKE 10 7x7x280 | | | | | |
| 15 mm | ○ ST/S YOKE 15 10x10x200 | ○ ST/M YOKE 15 10x10x280 | | | | | |
| 20 mm | ● ST/S YOKE 20 14x14x200 | ○ ST/M YOKE 20 14x14x280 | ○ ST/L YOKE 20 14x14x350 | | | | |
| 30 mm | | | ○ ST/L YOKE 30 20x20x350 | ○ ST/XL (/XL-P) YOKE 30 20x20x490 | | | |
| 35 mm | ● ST/S YOKE 35 25x24x200 | ○ ST/M YOKE 35 25x24x280 | | | | | |
| 40 mm | | | | | | | |
| 45 mm | ○ ST/S YOKE 45 30x26x200 | ○ ST/M YOKE 45 30x26x280 | ○ ST/L YOKE 45 30x26x350 | ○ ST/XL (/XL-P) YOKE 45 30x26x490 | ○ ST/XXL YOKE 45 30x26x750 | | |
| 60 mm | ● ST/S YOKE 60 40x38x200 | ○ ST/M YOKE 60 40x38x280 | ○ ST/L YOKE 60 40x38x350 | ○ ST/XL (/XL-P) YOKE 60 40x38x490 | ○ ST/XXL YOKE 60 40x38x750 | | |
| 70 mm | | ● ST/M YOKE 70 50x48x280 | ○ ST/L YOKE 70 50x48x350 | ○ ST/XL (/XL-P) YOKE 70 50x48x490 | ○ ST/XXL YOKE 70 50x48x750 | | |
| 85 mm | | | ○ ST/L YOKE 85 60x60x350 | ○ ST/XL (/XL-P) YOKE 85 60x60x490 | ○ ST/XXL YOKE 85 60x60x750 | ○ ST/XXXL YOKE 85 60x60x1080 | |
| 100 mm | | | ● ST/L YOKE 100 70x70x350 | ○ ST/XL (/XL-P) YOKE 100 70x70x490 | ○ ST/XXL YOKE 100 70x70x750 | | |
| 115 mm | | | | ● ST/XL (/XL-P) YOKE 115 80x80x490 | ○ ST/XXL YOKE 115 80x80x750 | ○ ST/XXXL YOKE 115 80x80x1080 | |
| 130 mm | | | | | ○ ST/XXL YOKE 130 90x90x750 | | |
| 145 mm | | | | | ● ST/XXL YOKE 145 100x100x750 | ○ ST/XXXL YOKE 145 100x100x1080 | |
| 215 mm | | | | | | ● ST/XXXL YOKE 215 150x150x1080 | |
| OPTIONAL EXTENSION YOKES | | | | | | | |
| Dimensions (L x l x h) (mm) | References : TOOL ST/ (Size of the device) EXTENSION YOKE (extension height) | | | | | | |
| 40 x 50 x 75 | ST/S EXTENSION YOKE 75 | | | | | | |
| 50 x 62 x 120 | | ST/M EXTENSION YOKE 120 | | | | | |
| 70 x 82 x 150 | | | ST/L EXTENSION YOKE 150 | | | | |
| 80 x 80 x 150 | | | | ST/XL-P EXTENSION YOKE 150 | | | |
| 80 x 80 x 200 | | | | ST/XL-P EXTENSION YOKE 200 | | | |
| OPTIONAL EQUIPMENT | | | | | | | |
| Carrying case | ST/S CARRYING CASE | | | | | | |
| Trolley | | | | ST/XL (/XL-P) TROLLEY | ST/XXL TROLLEY | | |
| Lifting device | | | | | ST/XXL LIFTING DEVICE | ST/XXXL LIFTING DEVICE | |

BORE PULLER KITS (with internal grasping)
> P 18


| Reference | TOOL BP SET (size) / Bore Puller | |
|----------------------|---|---|
| Contents | BP Set 5-44 7 clamps 1 against adjustable support 1 slide hammer | BP Set 45-100 3 clamps 1 against adjustable support |
| Bore diameter (mm) | 5 to 44 | 45 to 100 |
| Case dimensions (mm) | 405 x 345 x 100 | 490 x 500 x 130 |
| Case weight (kg) | 5 | 12 |
| Capacity (5 tons) | 50 kN | 50 kN |

> Description of components of the BP case Set 5-44

| Puller | For bearing with bore | | Thread | Length (L - mm) | Weight (g) |
|----------|-----------------------|------|--------|-----------------|------------|
| | Min. | Max. | | | |
| BP 5-7 | 5 | 7 | M8 | 27 | 60 |
| BP 8-11 | 8 | 11 | M8 | 40 | 40 |
| BP 12-15 | 12 | 15 | M8 | 53 | 120 |
| BP 16-19 | 16 | 19 | M8 | 53 | 140 |
| BP 20-26 | 20 | 26 | M8 | 55 | 260 |
| BP 28-34 | 28 | 34 | M8 | 60 | 320 |
| BP 35-44 | 35 | 44 | M8 | 78 | 410 |

> Description of components of the BP case Set 45-100

| Puller | For bearing with bore | | Thread | Length (L - mm) | Weight (g) |
|-----------|-----------------------|------|--------|-----------------|------------|
| | Min. | Max. | | | |
| BP 45-58 | 45 | 58 | M10 | 91 | 860 |
| BP 56-75 | 56 | 75 | M10 | 115 | 2040 |
| BP 74-100 | 74 | 100 | M10 | 125 | 3140 |

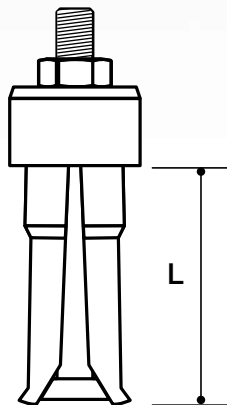



TECHNICAL DATA

DEEP-GROOVE BALL BEARING PULLER KIT



> P 19

| Reference | TOOL BBPS 10-100 / Ball bearing puller set | | | | | |
|-----------------|--|------|-------------------------|--------|-------------------------|-------------|
| Contents | 3 shafts, 28 arms, 22 metal rings, 3 o-rings, 1 crank, 1 centering pad | | | | | |
| Bore diameter | For bearing extraction from 10 to 100 mm | | | | | |
| Case dimensions | 490 x 500 x 130 mm | | | | | |
| Case weight | 8.4 kg | | | | | |
| Capacity | 70 kN (7 tons) | | | | | |
| Puller | For bearing with bore | | Dimensions (mm) | | | Weight (g) |
| | Min. | Max. | A | C | L | |
| BBPSA | 10 | 25 | A1/A2 - 140 A3 - 160 | 5 6 | A1/A2 - 160 A3 - 180 | 260 - 420 |
| BBPSB | 20 | 60 | 170 | 8 | 196 | 550 - 820 |
| BBPSC | 17 | 100 | 200 | 10 | 237 | 1260 - 1800 |

| | | | | | | | | | | | | | | | | | | | | | | |
|--|---|----------------------------------|------------------------|----------------------------------|----------------------|--------------------------------------|--------|--------------------------------------|-------------------|-------------------------|------------------------|------------------------------|----------------------|--|--------|-------------------|--|--|--------------|----------------------|--|-------|
|  |  | | | | | | | | | | | | | | | | | | | | | |
| BBPS A | <table border="1"> <tr> <td>A1⁽¹⁾</td> <td>28 x 3.00</td> <td>6000* 6001* 6002* 6003*</td> <td>6200*</td> <td></td> <td></td> <td>16002* 16003* 16100* 16101*</td> </tr> <tr> <td>A2⁽¹⁾</td> <td></td> <td>6004 6005 6006</td> <td>6201* 6202 6203</td> <td>6300</td> <td></td> <td></td> </tr> <tr> <td>A3⁽¹⁾</td> <td></td> <td></td> <td>6204 6205</td> <td>6301 6302 6303</td> <td></td> <td>62/22</td> </tr> </table> | A1 ⁽¹⁾ | 28 x 3.00 | 6000* 6001* 6002* 6003* | 6200* | | | 16002* 16003* 16100* 16101* | A2 ⁽¹⁾ | | 6004 6005 6006 | 6201* 6202 6203 | 6300 | | | A3 ⁽¹⁾ | | | 6204 6205 | 6301 6302 6303 | | 62/22 |
| A1 ⁽¹⁾ | 28 x 3.00 | 6000* 6001* 6002* 6003* | 6200* | | | 16002* 16003* 16100* 16101* | | | | | | | | | | | | | | | | |
| A2 ⁽¹⁾ | | 6004 6005 6006 | 6201* 6202 6203 | 6300 | | | | | | | | | | | | | | | | | | |
| A3 ⁽¹⁾ | | | 6204 6205 | 6301 6302 6303 | | 62/22 | | | | | | | | | | | | | | | | |
| BBPS B | <table border="1"> <tr> <td>B1⁽¹⁾</td> <td>50 x 3.00</td> <td>6007* 6008* 6009* 6010*</td> <td></td> <td></td> <td></td> <td>16011*</td> </tr> <tr> <td>B2⁽¹⁾</td> <td></td> <td>6011* 6012*</td> <td>6206 6207</td> <td>6304 6305 6306</td> <td></td> <td>62/28*</td> </tr> </table> | B1 ⁽¹⁾ | 50 x 3.00 | 6007* 6008* 6009* 6010* | | | | 16011* | B2 ⁽¹⁾ | | 6011* 6012* | 6206 6207 | 6304 6305 6306 | | 62/28* | | | | | | | |
| B1 ⁽¹⁾ | 50 x 3.00 | 6007* 6008* 6009* 6010* | | | | 16011* | | | | | | | | | | | | | | | | |
| B2 ⁽¹⁾ | | 6011* 6012* | 6206 6207 | 6304 6305 6306 | | 62/28* | | | | | | | | | | | | | | | | |
| BBPS C | <table border="1"> <tr> <td>C1⁽¹⁾</td> <td rowspan="2">85 x 3.00</td> <td>6014* 6015*</td> <td>6208 6209 6210</td> <td>6307</td> <td>6403</td> <td>63/28*</td> </tr> <tr> <td>C2⁽¹⁾</td> <td>6018* 6019* 6020*</td> <td>6211* 6212 6213*</td> <td>6308 6309 6310 6311</td> <td>6404 6405 6406</td> <td></td> </tr> </table> | C1 ⁽¹⁾ | 85 x 3.00 | 6014* 6015* | 6208 6209 6210 | 6307 | 6403 | 63/28* | C2 ⁽¹⁾ | 6018* 6019* 6020* | 6211* 6212 6213* | 6308 6309 6310 6311 | 6404 6405 6406 | | | | | | | | | |
| C1 ⁽¹⁾ | 85 x 3.00 | 6014* 6015* | | 6208 6209 6210 | 6307 | 6403 | 63/28* | | | | | | | | | | | | | | | |
| C2 ⁽¹⁾ | | 6018* 6019* 6020* | 6211* 6212 6213* | 6308 6309 6310 6311 | 6404 6405 6406 | | | | | | | | | | | | | | | | | |

* Bearing not requiring an extraction ring.



(1) - Our recommendations may change depending on the make of the bearing.

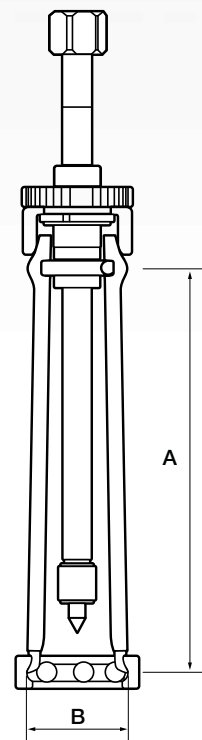

SELF-CENTERING PULLER (combined with 2/3 arms)

> P 20



| Reference | TOOL SCMP 2/3-(Max. reach) / Self-Center Mech Puller | | | | | | | |
|--------------|--|-----------------|-----------|-----------|-----------------|--------|--------|-------------|
| Type | Capacity (tons) | Max. reach (mm) | Spread | | Jaws dimensions | | | Weight (kg) |
| | | | Min. (mm) | Max. (mm) | A (mm) | B (mm) | C (mm) | |
| SCMP 2/3-120 | 2 | 80 | 36 | 120 | 8 | 6 | 15 | 1.6 |
| SCMP 2/3-180 | 3 | 120 | 38 | 180 | 6 | 7 | 15 | 2.3 |
| SCMP 2/3-270 | 5 | 160 | 42 | 270 | 11 | 10 | 25 | 4.3 |

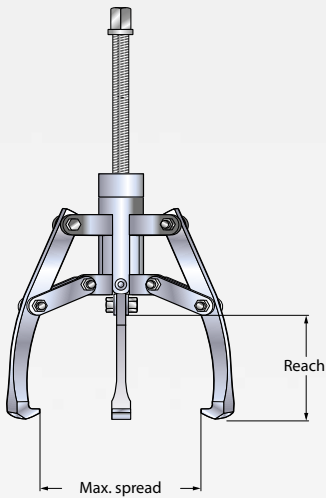

SELF-CENTERING HYDRAULIC PULLER (combined with 2 or 3 arms)

> P 21

| Reference | TOOL SCHP (Capacity) TONS / Self-Center Hyd Puller | | | | | | | | | | | |
|--------------|--|-----------------|------------------------|-------------|------|-----------------|------|----|----|----|----|-------------|
| Type | Capacity (ton) | Max. reach (mm) | Cylinder stroke H (mm) | Spread (mm) | | Dimensions (mm) | | | | | | Weight (kg) |
| | | | | Min. | Max. | A | B | C | E | F | G | |
| SCHP 4 Tons | 4 | 190 | 60 | 68 | 315 | 13 | 10 | 22 | 40 | 42 | 22 | 9 |
| SCHP 12 Tons | 12 | 300 | 85 | 90 | 515 | 15 | 16.5 | 29 | 70 | 60 | 28 | 17 |
| SCHP 20 Tons | 20 | 325 | 111 | 120 | 520 | 20 | 27 | 33 | 62 | 80 | 40 | 28 |
| SCHP 30 Tons | 30 | 415 | 111 | 120 | 620 | 20 | 27 | 38 | 85 | 98 | 50 | 39 |

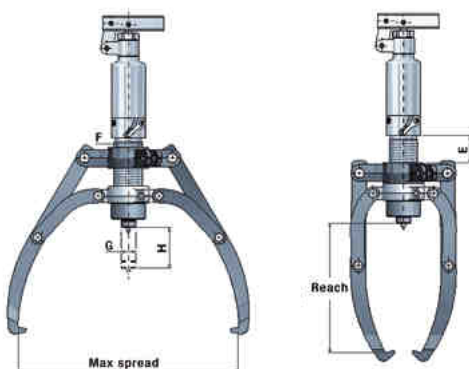

TECHNICAL DATA

ACCESSORY CASE FOR HYDRAULIC PULLER

► P 22


| | | | |
|--------------|--|-----------------------|----------------------------|
| Reference | TOOL AS-SCHP (Hydraulic extractor capacity) T / acc set hyd puller | | |
| Contents | 1 pulling arm, 2 braces, 1 separator, 2 blades with 2 threaded studs | | |
| Reference | Max. reach (mm) | Spread Min./Max. (mm) | Weight with packaging (kg) |
| AS-SCHP 4 T | 250 | 15 - 110 | 7 |
| AS-SCHP 12 T | 380 | 45 - 290 | 22 |



TRI-SECTION PULLING PLATE

► P 23

| Reference | TOOL BP3S 50-210 / TRI-SECTION PULLING PLATE | | | | | | |
|---|--|----------------|-------------------|---------------|---------------|------------------|-------------|
| Materials | Forged steel alloy | | | | | | |
| DIMENSIONS (mm) | | | | | | | |
| Shaft diameter Min. (A1) / Max. (A2) (mm) | | Capacity (ton) | Max spread B (mm) | Length D (mm) | Thread E | Thickness F (mm) | Weight (kg) |
| 26 | 160 | 4 | 216 | 240 | 5/8" – 11 UNC | 8 | 3.5 |
| 50 | 210 | 8 | 280 | 285 | 3/4" – 16 UNF | 31 | 5.5 |
| 90 | 340 | 12 | 460 | 430 | 7/8" – 16 UNF | 45 | 16.5 |
| 140 | 495 | 30 | 660 | 600 | 1" – 14 UNF | 61 | 41 |

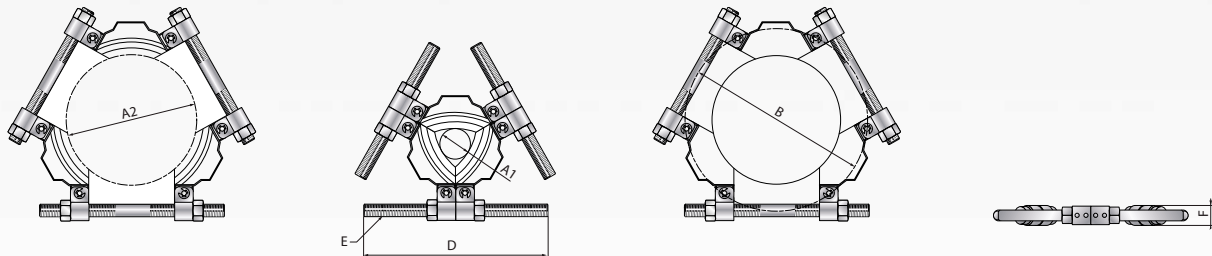




PULLER - STRIPPING KIT

► P 24

| | |
|-----------------|---|
| Reference | TOOL BPES 10-105 |
| Contents | 1 adjustable bridge, 1 separator, 2 removable puller arms 2 extensions, 1 tip protector, 2 coupling nuts |
| Case dimensions | 490 x 500 x 130 mm |
| Case weight | 11 kg |
| Capacity | 100 kN (10 tons) |

► Description of components of the BPES case 10-105

| | Shaft diameter (mm) | Bore diameter (mm) | Outside diameter (mm) | Max. reach (mm) |
|--------------------------|---------------------|--------------------|-----------------------|-----------------|
| Separator | 10-105 | - | 175 (max.) | 150 |
| Internal gripping puller | - | 159-222 | - | 160 |
| External gripping puller | - | - | 30-155 | 160 |






HYDRAULIC PULLER FOR MOUNTING AND REMOVAL

► P 25

| Reference | TOOL PUSH/PULLER 8/12 Tons | | | | | | | | | |
|-----------------------|--|--------------|------------|------|-----------------|-----|----|-----------|----|-------------|
| Contents | 1 double acting hydraulic cylinder, 3 arms, 3 extensions, 1 internal gripping puller | | | | | | | | | |
| Type | Capacity (ton) | Reach (max.) | Spread - A | | Dimensions (mm) | | | | | Weight (kg) |
| | | | Min. | Max. | B | C | D | E | F | |
| Thrust | 8 | 130 | 44 | 280 | 270 | 140 | 28 | M12-P1.75 | 30 | 19.5 |
| Extraction (external) | 12 | 240* | 85 | 300 | 260 | 140 | 28 | - | - | |
| Extraction (internal) | 8 | 105 | 110 | 210 | 130-150 | - | - | 1"-12UNF | - | |


* without adapter (180 mm with adapter)

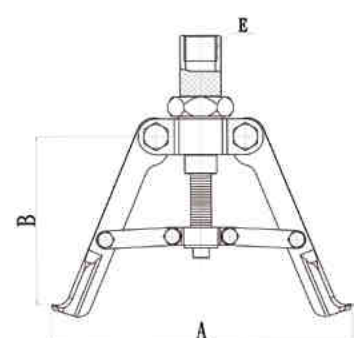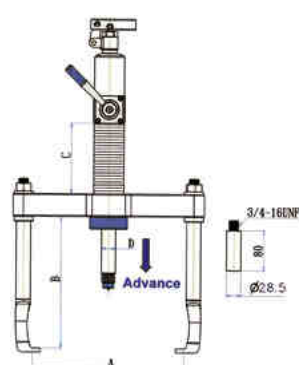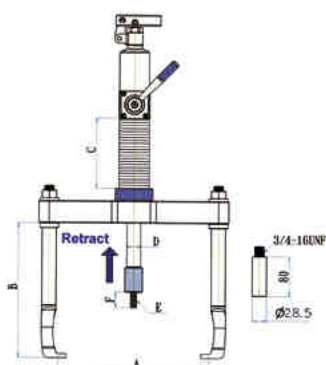

TECHNICAL DATA

| HYDRAULIC NUTS (equipped with automatic piston return device) > P 28 | |
|--|--|
| References | TOOL HMV (size) EBF / Hydraulic Nut (metric) TOOL HMVC (size) EBF / Hydraulic Nut (inches) |
| Materials | |
| HMV 10 EBF – HMV 40 EBF | Fine metric thread according to ISO 965-1998 Class 6H tolerance |
| HMV 41 EBF – HMV 200 EBF | Trapezoidal thread according to ISO 2901-1993 Class 7H tolerance |
| Nuts Sizes ≤ HMV 54 EBF Sizes ≤ HMV 92 EBF Sizes ≤ HMV 200 EBF | Recommended pump references: Pump 700b-0.3 l / Pump 700b-0.9 l Pump 700b-0.9 l Contact us |
| Component Reference - hydraulic nuts | |
| Set of O-rings | Nut Reference followed by / Piston Seals: Example: TOOL HMV 15 / Piston Seals |
| Ball valve | 1500 bar Reference: TOOL HMV BALL PLUG 1/4 |
| Quick coupling connection (male) | With seal washer and connecting nipple Reference : TOOL HMV NIPPLE 1/4 Dimensions: see page 50 |

A-A (1 : 2)

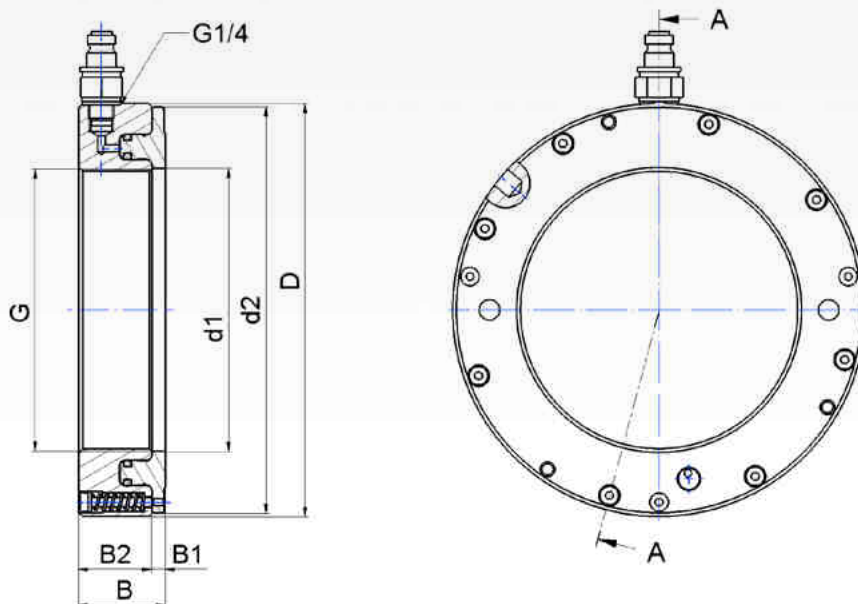

DIMENSIONS (MM) AND WEIGHT (KG) OF HYDRAULIC NUTS (metric)

| Size | Thread | Outside diameter (mm) | Total width (mm) | Piston diameter (mm) | Permissible stroke of the piston (mm) | Flange width (mm) | Body width (mm) | Diameter (mm) | Surface of the piston (mm ²) | Weight (kg) |
|-------------|---------|-----------------------|------------------|----------------------|---------------------------------------|-------------------|-----------------|---------------|--|-------------|
| HMV ... EBF | G | D | B | max. d2 | | B1 | B2 | d1 | | |
| 10 | M50x1,5 | 114 | 43 | 110 | 5 | 5 | 38 | 50.5 | 2850 | 2.9 |
| 11 | M55x2 | 120 | 43 | 116 | 5 | 5 | 38 | 55.5 | 3050 | 3 |
| 12 | M60x2 | 125 | 43 | 121 | 5 | 5 | 38 | 60.5 | 3250 | 3 |
| 13 | M65x2 | 130 | 43 | 126 | 5 | 5 | 38 | 65.5 | 3500 | 3.2 |
| 14 | M70x2 | 135 | 43 | 131 | 5 | 5 | 38 | 70.5 | 3650 | 3.4 |
| 15 | M75x2 | 140 | 43 | 136 | 5 | 5 | 38 | 75.5 | 3850 | 3.6 |
| 16 | M80x2 | 146 | 43 | 142 | 5 | 5 | 38 | 80.5 | 4150 | 3.9 |
| 17 | M85x2 | 150 | 43 | 146 | 5 | 5 | 38 | 85.5 | 4300 | 4 |
| 18 | M90x2 | 156 | 43 | 152 | 5 | 5 | 38 | 90.5 | 4850 | 4.2 |
| 19 | M95x2 | 162 | 43 | 158 | 5 | 5 | 38 | 95.5 | 5050 | 4.5 |
| 20 | M100x2 | 166 | 44 | 162 | 5 | 6 | 38 | 100.5 | 5100 | 4.6 |
| 21 | M105x2 | 172 | 44 | 168 | 5 | 6 | 38 | 105.5 | 5200 | 4.9 |
| 22 | M110x2 | 178 | 44 | 174 | 5 | 6 | 38 | 110.5 | 5400 | 5.2 |
| 23 | M115x2 | 182 | 44 | 178 | 5 | 6 | 38 | 115.5 | 5800 | 5.2 |
| 24 | M120x2 | 188 | 44 | 184 | 5 | 6 | 38 | 120.5 | 5950 | 5.5 |
| 25 | M125x2 | 192 | 44 | 188 | 5 | 6 | 38 | 125.5 | 6350 | 5.6 |
| 26 | M130x2 | 198 | 44 | 194 | 5 | 6 | 38 | 130.5 | 6450 | 5.9 |
| 27 | M135x2 | 204 | 44 | 200 | 5 | 6 | 38 | 135.5 | 6900 | 6.1 |
| 28 | M140x2 | 208 | 45 | 204 | 5 | 7 | 38 | 140.5 | 7250 | 6.2 |
| 29 | M145x2 | 214 | 46 | 210 | 5 | 7 | 39 | 145.5 | 7400 | 6.7 |
| 30 | M150x2 | 220 | 46 | 216 | 5 | 7 | 39 | 150.5 | 7600 | 6.8 |
| 31 | M155x3 | 226 | 46 | 222 | 5 | 7 | 39 | 155.5 | 8450 | 7.2 |
| 32 | M160x3 | 232 | 47 | 228 | 6 | 7 | 40 | 160.5 | 8650 | 7.8 |
| 33 | M165x3 | 238 | 47 | 234 | 6 | 7 | 40 | 165.5 | 8750 | 8.1 |
| 34 | M170x3 | 244 | 48 | 240 | 6 | 7 | 41 | 170.5 | 9800 | 8.6 |
| 36 | M180x3 | 256 | 48 | 252 | 6 | 7 | 41 | 180.5 | 11250 | 9.4 |
| 38 | M190x3 | 270 | 50 | 266 | 7 | 8 | 42 | 191 | 11800 | 10.7 |
| 40 | M200x3 | 282 | 51 | 278 | 8 | 8 | 43 | 201 | 12100 | 11.7 |
| 41 | Tr205x4 | 288 | 51 | 284 | 8 | 8 | 43 | 207 | 13050 | 12.2 |
| 42 | Tr210x4 | 294 | 52 | 290 | 9 | 8 | 44 | 212 | 13400 | 12.7 |
| 43 | Tr215x4 | 300 | 52 | 296 | 9 | 8 | 44 | 217 | 14050 | 13.2 |
| 44 | Tr220x4 | 306 | 52 | 302 | 9 | 8 | 44 | 222 | 14800 | 13.7 |
| 45 | Tr225x4 | 312 | 53 | 308 | 9 | 8 | 45 | 227 | 15150 | 14.7 |
| 46 | Tr230x4 | 318 | 53 | 314 | 9 | 8 | 45 | 232 | 15450 | 14.7 |
| 47 | Tr235x4 | 326 | 54 | 322 | 10 | 8 | 46 | 237 | 16600 | 16.2 |
| 48 | Tr240x4 | 330 | 55 | 326 | 10 | 9 | 46 | 242 | 17250 | 16.2 |
| 50 | Tr250x4 | 342 | 55 | 338 | 10 | 9 | 46 | 252 | 17550 | 17.7 |
| 52 | Tr260x4 | 356 | 56 | 352 | 11 | 9 | 47 | 262 | 19150 | 19.2 |
| 54 | Tr270x4 | 368 | 57 | 364 | 12 | 9 | 48 | 272 | 20350 | 20.7 |
| 56 | Tr280x4 | 380 | 58 | 376 | 12 | 9 | 49 | 282 | 21050 | 22.2 |
| 58 | Tr290x4 | 390 | 58 | 386 | 13 | 9 | 49 | 292 | 22350 | 22.7 |
| 60 | Tr300x4 | 404 | 61 | 400 | 14 | 10 | 51 | 302 | 23600 | 25.7 |

TECHNICAL DATA

DIMENSIONS (MM) AND WEIGHT (KG) OF HYDRAULIC NUTS (metric)

| Size | Thread | Outside diameter (mm) | Total width (mm) | Piston diameter (mm) | Permissible stroke of the piston (mm) | Flange width (mm) | Body width (mm) | Diameter (mm) | Surface of the piston (mm ²) | Weight (kg) |
|-------------|----------|-----------------------|------------------|----------------------|---------------------------------------|-------------------|-----------------|---------------|--|-------------|
| HMV ... EBF | G | D | B | max. d2 | | B1 | B2 | d1 | | |
| 62 | Tr310x5 | 416 | 62 | 412 | 14 | 10 | 52 | 312 | 24850 | 27,2 |
| 64 | Tr320x5 | 428 | 63 | 424 | 14 | 10 | 53 | 322 | 26250 | 29,7 |
| 66 | Tr330x5 | 438 | 63 | 434 | 14 | 10 | 53 | 332 | 27500 | 30,2 |
| 68 | Tr340x5 | 450 | 64 | 446 | 14 | 10 | 54 | 342 | 27750 | 31,7 |
| 69 | Tr345x5 | 456 | 64 | 452 | 14 | 10 | 54 | 347 | 29350 | 32,7 |
| 70 | Tr350x5 | 464 | 66 | 460 | 14 | 10 | 56 | 352 | 29800 | 35,2 |
| 72 | Tr360x5 | 472 | 66 | 468 | 15 | 10 | 56 | 362 | 31250 | 35,7 |
| 73 | Tr365x5 | 482 | 68 | 478 | 15 | 11 | 57 | 367 | 31600 | 38,7 |
| 74 | Tr370x5 | 486 | 68 | 482 | 16 | 11 | 57 | 372 | 33300 | 39,2 |
| 76 | Tr380x5 | 498 | 69 | 494 | 16 | 11 | 58 | 382 | 33500 | 40,7 |
| 77 | Tr385x5 | 504 | 69 | 500 | 16 | 11 | 58 | 387 | 34050 | 41,2 |
| 80 | Tr400x5 | 522 | 71 | 518 | 17 | 11 | 60 | 402 | 36600 | 45,7 |
| 82 | Tr410x5 | 534 | 72 | 530 | 17 | 11 | 61 | 412 | 38200 | 48,2 |
| 84 | Tr420x5 | 546 | 72 | 542 | 17 | 11 | 61 | 422 | 39900 | 50,2 |
| 86 | Tr430x5 | 556 | 73 | 552 | 17 | 11 | 62 | 432 | 40750 | 52,7 |
| 88 | Tr440x5 | 566 | 74 | 562 | 17 | 12 | 62 | 442 | 42400 | 54,2 |
| 90 | Tr450x5 | 580 | 76 | 576 | 17 | 12 | 64 | 452 | 44100 | 57,7 |
| 92 | Tr460x5 | 590 | 76 | 586 | 17 | 12 | 64 | 462 | 45100 | 60,2 |
| 94 | Tr470x5 | 602 | 77 | 598 | 18 | 12 | 65 | 472 | 46800 | 62,2 |
| 96 | Tr480x5 | 612 | 77 | 608 | 19 | 12 | 65 | 482 | 48600 | 63,2 |
| 98 | Tr490x5 | 624 | 78 | 620 | 19 | 12 | 66 | 492 | 49500 | 66,2 |
| 100 | Tr500x5 | 636 | 79 | 630 | 19 | 12 | 67 | 502 | 49950 | 70,2 |
| 102 | Tr510x6 | 648 | 80 | 642 | 20 | 12 | 68 | 512 | 53300 | 74,2 |
| 104 | Tr520x6 | 658 | 81 | 652 | 20 | 13 | 68 | 522 | 54250 | 75,2 |
| 106 | Tr530x6 | 670 | 82 | 664 | 21 | 13 | 69 | 532 | 56150 | 79,2 |
| 108 | Tr540x6 | 682 | 82 | 676 | 21 | 13 | 69 | 542 | 58200 | 81,2 |
| 110 | Tr550x6 | 693 | 83 | 687 | 21 | 13 | 70 | 552 | 59150 | 84,2 |
| 112 | Tr560x6 | 704 | 84 | 698 | 22 | 13 | 71 | 562 | 61150 | 88,2 |
| 114 | Tr570x6 | 716 | 85 | 710 | 23 | 13 | 72 | 572 | 63200 | 91,2 |
| 116 | Tr580x6 | 726 | 85 | 720 | 23 | 13 | 72 | 582 | 64200 | 94,2 |
| 120 | Tr600x6 | 748 | 86 | 742 | 23 | 13 | 73 | 602 | 67400 | 100,2 |
| 126 | Tr630x6 | 782 | 88 | 776 | 23 | 14 | 74 | 632 | 72850 | 110,2 |
| 130 | Tr650x6 | 804 | 89 | 798 | 23 | 14 | 75 | 652 | 76100 | 115,2 |
| 134 | Tr670x6 | 826 | 90 | 820 | 24 | 14 | 76 | 672 | 79450 | 120,2 |
| 138 | Tr690x6 | 848 | 91 | 842 | 25 | 14 | 77 | 692 | 84200 | 127,2 |
| 142 | Tr710x7 | 870 | 93 | 864 | 25 | 15 | 78 | 712 | 87700 | 135,2 |
| 150 | Tr750x7 | 912 | 94 | 906 | 25 | 15 | 79 | 752 | 95050 | 146,2 |
| 160 | Tr800x7 | 965 | 96 | 959 | 25 | 16 | 80 | 802 | 103800 | 161,2 |
| 170 | Tr850x7 | 1020 | 99 | 1014 | 26 | 16 | 83 | 852 | 114450 | 181,2 |
| 180 | Tr900x7 | 1075 | 103 | 1069 | 30 | 17 | 86 | 902 | 123950 | 205,2 |
| 190 | Tr950x8 | 1126 | 103 | 1120 | 30 | 17 | 86 | 952 | 135450 | 218,2 |
| 200 | Tr1000x8 | 1180 | 105 | 1174 | 34 | 17 | 88 | 1002 | 145700 | 239,2 |

DIMENSION (MM) AND WEIGHT (KG) OF HYDRAULIC NUTS (dimension in inches)

| Size | Thread | Number of threads per inch | Outside diameter (in.) | Piston diameter (in.) | Piston diameter (in.) | Permissible stroke of the piston (in.) | Flange width (in.) | Body width (in.) | Diameter (in.) | Surface of the piston (in. ²) | Weight (lb) |
|--------------|--------|----------------------------|------------------------|-----------------------|-----------------------|--|--------------------|------------------|----------------|---|-------------|
| HMVC ... EBF | G | | D | B | max. d2 | | B1 | B2 | d1 | | |
| 10 | 1,967 | 18 | 4,5 | 1,7 | 4,4 | 0,20 | 0,20 | 1,5 | 2,0 | 4,4 | 6,3 |
| 11 | 2,157 | 18 | 4,7 | 1,7 | 4,6 | 0,20 | 0,20 | 1,5 | 2,2 | 4,8 | 6,8 |
| 12 | 2,360 | 18 | 4,9 | 1,7 | 4,8 | 0,20 | 0,20 | 1,5 | 2,4 | 5,1 | 7,2 |
| 13 | 2,548 | 18 | 5,1 | 1,7 | 5,0 | 0,20 | 0,20 | 1,5 | 2,6 | 5,4 | 7,6 |
| 14 | 2,751 | 18 | 5,3 | 1,7 | 5,2 | 0,20 | 0,20 | 1,5 | 2,8 | 5,8 | 7,9 |
| 15 | 2,933 | 12 | 5,5 | 1,7 | 5,4 | 0,20 | 0,20 | 1,5 | 3,0 | 6,1 | 8,3 |
| 16 | 3,137 | 12 | 5,7 | 1,7 | 5,6 | 0,20 | 0,20 | 1,5 | 3,2 | 6,4 | 8,7 |
| 17 | 3,340 | 12 | 5,9 | 1,7 | 5,8 | 0,20 | 0,20 | 1,5 | 3,4 | 6,7 | 9,1 |
| 18 | 3,527 | 12 | 6,1 | 1,7 | 6,0 | 0,20 | 0,20 | 1,5 | 3,6 | 6,8 | 9,5 |
| 19 | 3,730 | 12 | 6,4 | 1,7 | 6,2 | 0,20 | 0,20 | 1,5 | 3,8 | 7,5 | 10,0 |
| 20 | 3,918 | 12 | 6,5 | 1,7 | 6,4 | 0,20 | 0,24 | 1,5 | 4,0 | 7,5 | 10,4 |
| 21 | 4,122 | 12 | 6,8 | 1,7 | 6,6 | 0,20 | 0,24 | 1,5 | 4,2 | 8,1 | 11,0 |
| 22 | 4,325 | 12 | 7,0 | 1,7 | 6,9 | 0,20 | 0,24 | 1,5 | 4,4 | 8,8 | 11,6 |
| 24 | 4,716 | 12 | 7,4 | 1,7 | 7,2 | 0,20 | 0,24 | 1,5 | 4,8 | 9,4 | 12,4 |
| 26 | 5,106 | 12 | 7,8 | 1,7 | 7,6 | 0,20 | 0,24 | 1,5 | 5,2 | 10,1 | 13,2 |
| 28 | 5,497 | 12 | 8,2 | 1,8 | 8,0 | 0,20 | 0,28 | 1,5 | 5,6 | 10,7 | 14,3 |
| 30 | 5,888 | 12 | 8,7 | 1,8 | 8,5 | 0,20 | 0,28 | 1,5 | 6,0 | 12,3 | 16,0 |
| 32 | 6,284 | 8 | 9,1 | 1,9 | 9,0 | 0,24 | 0,28 | 1,6 | 6,4 | 14,0 | 18,0 |
| 34 | 6,659 | 8 | 9,6 | 1,9 | 9,4 | 0,24 | 0,28 | 1,6 | 6,8 | 15,8 | 19,9 |
| 36 | 7,066 | 8 | 10,1 | 1,9 | 9,9 | 0,24 | 0,28 | 1,6 | 7,2 | 17,7 | 21,5 |
| 38 | 7,472 | 8 | 10,6 | 2,0 | 10,5 | 0,28 | 0,31 | 1,7 | 7,6 | 18,5 | 24,9 |
| 40 | 7,847 | 8 | 11,1 | 2,0 | 10,9 | 0,31 | 0,31 | 1,7 | 8,0 | 19,4 | 27,3 |
| 44 | 8,628 | 8 | 12,0 | 2,0 | 11,9 | 0,31 | 0,31 | 1,7 | 8,8 | 21,1 | 31,9 |
| 46 | 9,125 | 8 | 12,5 | 2,1 | 12,4 | 0,31 | 0,31 | 1,8 | 9,2 | 21,9 | 34,7 |
| 48 | 9,442 | 6 | 13,0 | 2,2 | 12,8 | 0,35 | 0,35 | 1,8 | 9,6 | 25,4 | 37,8 |
| 52 | 10,192 | 6 | 14,0 | 2,2 | 13,9 | 0,35 | 0,35 | 1,9 | 10,4 | 27,2 | 44,4 |
| 56 | 11,004 | 6 | 15,0 | 2,3 | 14,8 | 0,39 | 0,35 | 1,9 | 11,2 | 30,7 | 51,4 |
| 60 | 11,785 | 6 | 16,1 | 2,4 | 16,0 | 0,39 | 0,39 | 2,0 | 12,0 | 37,0 | 64,4 |
| 64 | 12,562 | 6 | 16,9 | 2,5 | 16,8 | 0,43 | 0,39 | 2,1 | 12,8 | 39,2 | 70,8 |
| 68 | 13,339 | 5 | 17,7 | 2,5 | 17,6 | 0,47 | 0,39 | 2,1 | 13,5 | 41,4 | 75,7 |
| 72 | 14,170 | 5 | 18,9 | 2,6 | 18,7 | 0,51 | 0,39 | 2,2 | 14,3 | 51,8 | 89,7 |
| 76 | 14,957 | 5 | 19,7 | 2,7 | 19,5 | 0,55 | 0,43 | 2,3 | 15,1 | 54,4 | 98,2 |
| 80 | 15,745 | 5 | 20,9 | 2,8 | 20,7 | 0,55 | 0,43 | 2,4 | 15,9 | 54,8 | 116,4 |
| 84 | 16,532 | 5 | 21,9 | 2,8 | 21,7 | 0,55 | 0,43 | 2,4 | 16,7 | 60,8 | 127,7 |
| 88 | 17,319 | 5 | 22,6 | 2,9 | 22,5 | 0,55 | 0,43 | 2,4 | 17,5 | 63,4 | 134,1 |
| 92 | 18,107 | 5 | 23,6 | 3,0 | 23,5 | 0,59 | 0,47 | 2,5 | 18,3 | 71,3 | 150,6 |
| 96 | 18,894 | 5 | 24,4 | 3,0 | 24,3 | 0,63 | 0,47 | 2,6 | 19,1 | 78,2 | 158,0 |
| 100 | 19,682 | 5 | 25,6 | 3,1 | 25,4 | 0,63 | 0,47 | 2,6 | 19,8 | 85,7 | 181,6 |
| 106 | 20,867 | 4 | 26,8 | 3,2 | 26,6 | 0,67 | 0,51 | 2,7 | 21,0 | 85,89 | 199,4 |
| 112 | 22,048 | 4 | 28,1 | 3,3 | 28,0 | 0,71 | 0,51 | 2,8 | 22,2 | 87,0 | 221,1 |
| 120 | 23,623 | 4 | 29,9 | 3,4 | 29,8 | 0,75 | 0,51 | 2,9 | 23,8 | 101,0 | 249,2 |
| 126 | 24,804 | 4 | 31,1 | 3,5 | 30,9 | 0,75 | 0,55 | 2,9 | 25,0 | 105,6 | 266,4 |
| 134 | 26,379 | 4 | 33,1 | 3,5 | 32,9 | 0,87 | 0,55 | 3,0 | 26,5 | 125,3 | 307,8 |
| 142 | 27,961 | 3 | 34,6 | 3,7 | 34,5 | 0,91 | 0,59 | 3,1 | 28,1 | 132,1 | 337,1 |
| 150 | 29,536 | 3 | 36,2 | 3,7 | 36,1 | 0,91 | 0,59 | 3,1 | 29,7 | 138,9 | 358,1 |
| 160 | 31,504 | 3 | 38,2 | 3,8 | 38,0 | 0,98 | 0,63 | 3,1 | 31,7 | 147,4 | 387,1 |
| 170 | 33,473 | 3 | 40,6 | 3,9 | 40,4 | 1,02 | 0,63 | 3,3 | 33,6 | 179,2 | 448,0 |
| 180 | 35,441 | 3 | 43,3 | 4,1 | 43,1 | 1,10 | 0,67 | 3,4 | 35,6 | 238,6 | 545,6 |
| 190 | 37,410 | 3 | 45,3 | 4,1 | 45,1 | 1,10 | 0,67 | 3,4 | 37,6 | 250,8 | 575,3 |

TECHNICAL DATA

MANUAL HYDRAULIC PUMP KITS

> P 29

| References | TOOL PUMP SET 700B-(Reservoir capacity) L / Pump with accessories | |
|--|---|---------------------------------------|
| Contents | Pump Set 700b-0.3 L | Pump Set 700b-0.9 L |
| Ⓐ 1 2-stage manual pump | 700 bar pump with 0.3 litre reservoir | 700 bar pump with 0.9 litre reservoir |
| Ⓑ 1 adaptor for pressure gauge* | 1/4" male, 3/8" female | 3/8" male, 3/8" female |
| Ⓒ 1 pressure gauge | 700 bar | 700 bar |
| Ⓓ 1 hose | 700 bar, length 1.5 m | 700 bar, length 3 m |
| Ⓔ 1 quick coupling connection (female) | G 1/4 (1500 bar) | G 1/4 (1500 bar) |


> Description of the manual hydraulic pump kit components

Ⓐ ULTRA LIGHT MANUAL PUMP (with two stages)

> P 29

| Reference | TOOL PUMP 700b - (reservoir capacity) L | | | | | |
|------------------|--|--|--|--|----------------------------------|-------------------------|
| Material | Glass fibre reinforced composite tank | | | | | |
| Reference TOOL + | Nominal pressure 1 st stage (bar) | Nominal pressure 2 nd stage (bar) | Volume/stroke 1 st stage (cm ³) | Volume/stroke 2 nd stage (cm ³) | Tank capacity (cm ³) | Weight (bare pump) (kg) |
| PUMP 700b-0.3l | 13 | 700 | 3.6 | 0.9 | 320 | 2.4 |
| PUMP 700b-0.9l | 13 | 700 | 11.3 | 2.5 | 900 | 4.1 |

| Reference TOOL + | DIMENSIONS (mm) | | | | | | | | | | | | |
|------------------|-----------------|-----|----|----|----|----------------|-----|----|-----|----|-----|----|---|
| | A | B | C | D | E | G | H | J | L | M | N | P | S |
| PUMP 700b-0.3l | 185 | 336 | 28 | 85 | 28 | 1/4" - 18 NPTF | 319 | 19 | 143 | - | 95 | 80 | 7 |
| PUMP 700b-0.9l | 344 | 533 | 36 | 99 | 33 | 3/8" - 18 NPTF | 522 | 30 | 177 | 16 | 120 | - | - |

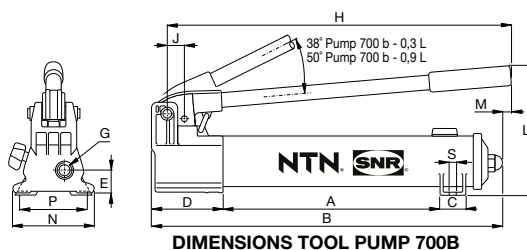

Ⓑ PRESSURE GAUGE ADAPTOR ACCORDING TO PUMP


> P 29

| Reference | TOOL gauge adapter (Reservoir capacity) L | | |
|---------------------|---|-----------|--------------|
| Reference TOOL+ | Pressure gauge port | Male end | Female end |
| GAUGE ADAPTER 0.3 l | NPTF 1/4" | NPTF 1/4" | NPTF 3/8" |
| GAUGE ADAPTER 0.9 l | | NPTF 3/8" | |

Ⓒ PRESSURE GAUGE

> P 29

| Reference | TOOL PUMP GAUGE 700 |
|--------------------------|----------------------|
| Permitted pressure | 700 bar (10 000 psi) |
| Precision (% full scale) | +/- 1.0 (-1.5%) |
| Graduation | Bar |
| Scales | Bar |
| Large graduations | 100 |
| Small graduations | 20 |
| Connecting thread C | 1/4" NPTF |
| Diameter A | 100 mm |
| Height D | 130 mm |
| Thickness B | 35 mm |



Ⓓ HIGH PRESSURE HOSE


> P 29

| Reference | TOOL HYDRAULIC HOSE (length in mm) | | | | | |
|--------------------------|---|---------------------|-------------|-------------|------------------|-------------------------|
| Material | Thermoplastic reinforced with layers of woven steel wire Polyurethane envelope | | | | | |
| References | Max. working pressure (bar) | Inner diameter (mm) | Length (mm) | Weight (kg) | Connection end 1 | Connection end 2 (male) |
| TOOL HYDRAULIC HOSE 1500 | 700 | 6.4 | 1,500 | 0.8 | 3/8" - 18 NPTF | G 1/4 750 bar |
| TOOL HYDRAULIC HOSE 3000 | 700 | 6.4 | 3,000 | 1.5 | 3/8" - 18 NPTF | G 1/4 750 bar |

Ⓔ QUICK COUPLING CONNECTION, FEMALE (connection on end 2)

> P 29

| Reference | TOOL PUMP COUPLING 1/4 |
|--------------------------|---|
| Material | High strength steel. Black zinc treatment |
| Type of valve | Flat face for minimum discharge of fluid on disconnection |
| Maximum service pressure | 1500 bar |

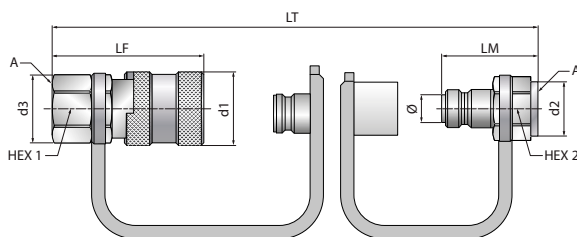

Note – Seal washer and connecting nipple included in HMV NIPPLE 1/4 are not represented on the drawing.

| Thread A BSP | d1 (mm) | d3 (mm) | Nut Hex1 (mm) | LF (mm) | d2 (mm) | Nut Hex2 (mm) | LM (mm) | LT (mm) | ∅ (mm) | Reference Female TOOL+ | Weight (g) | Reference Male TOOL+ | Weight (g) |
|--------------|---------|---------|---------------|---------|---------|---------------|---------|---------|--------|------------------------|------------|----------------------|------------|
| G 1/4 | 28.2 | 26.8 | 24 | 59.5 | 24.5 | 22 | 38 | 79.5 | 14.9 | PUMP COUPLING 1/4 | 192 | HMV NIPPLE 1/4 | 69 |

TECHNICAL DATA

| HEAT-RESISTANT GLOVES | | > P 32 |
|-----------------------|---------------------------|--------|
| Reference | TOOL GLOVE HEAT RESISTANT | |
| Material | KEVLAR | |
| Lined | Coton | |
| Single size | 10.5 | |
| Maximum temperature | 350°C | |
| Quantity per packet | 1 | |

| SET OF CALIBRATED FEELER GAUGES OF CALIBRATED THICKNESS | | | | | | > P 32 |
|---|----------------------------------|---------------------------|-------------------------------|------|-------------|------------|
| Reference | FEELER GAUGE TOOL (gauge length) | | | | | |
| | Number of gauges | Field of measurement (mm) | Blade thickness (1/100 of mm) | | Length (mm) | Weight (g) |
| TOOL FEELER GAUGES 100 | 17 | 0.02 – 0.5 | 0.02 | 0.15 | 100 | 65 |
| TOOL FEELER GAUGES 150 | | | 0.03 | 0.20 | | |
| | | | 0.04 | 0.25 | | |
| TOOL FEELER GAUGES 300 | | | 0.05 | 0.30 | 150 | 85 |
| | | | 0.06 | 0.35 | | |
| | | | 0.07 | 0.40 | | |
| | | | 0.08 | 0.45 | 300 | 175 |
| | | | 0.09 | 0.50 | | |
| | | | 0.10 | | | |


INFRARED THERMOMETER WITH LASER
> P 33
Reference TOOL LASERTEMP 301 / IR Thermometer

APPLIANCE CHARACTERISTICS

| | |
|---|---|
| Spectral response | 8 -14 mm |
| Optics | D.S : 30:1 (50 mm to 1500 mm) |
| Response time | Less than one second |
| Temperature range | From -50 to +850°C |
| Accuracy* | From -50 to -20°C : ±5°C From -20 to +200°C : ±1.5% of the reading ±2°C From +200 to +538 °C : ±2% of the reading ±2°C From +538 to +850°C : ±3.5% of the reading ±5°C |
| Display resolution | 0.1°C |
| Emissivity | Adjustable between 0.10 and 1.00 (pre-set at 0.95) |
| Screen indication : | Indication of level exceeded “-01” for under-range “01” for over-range |
| Laser aiming device | Wave length : 630-670 nm output lower than 1mW, class 2 (II) |
| Indication of positive or negative temperature | Automatic (no indication for a positive temperature) Sign (-) for a negative temperature |
| Screen | 4½ digits with backlit LCD screen |
| Auto switch-off: | After 7 seconds of inactivity High/low alarm |
| Thresholds | Flashing signal on screen and audible signal with adjustable thresholds |
| Supply | 9 V alkaline battery |
| Battery life | 38 hr (laser and backlight inactive) 15 hr (laser and backlight active) |
| Temperature for use | From 0 to +50°C |
| Storage temperature | From -20°C to +60°C |
| Relative humidity | From 10% to 90% RH in operation and less than 80% RH in storage |
| Dimensions | 175 x 110 x 45 mm |
| Weight | 230 g (including battery) |
| Memory | 20 temperature values with unit of measurement (°C or °F) |

** Accurate for an ambient temperature between 18 and 28°C (with relative humidity below 80%)*
CHARACTERISTICS OF THE THERMOCOUPLE PROBE K

| | |
|--------------------------|---------------------------|
| Temperature range | From -40 to +400°C |
| Display range | From -50 to +1370°C |
| Resolution | 0.1°C |
| Accuracy | ±1.5% of the reading ±3°C |
| Cable length | 1 m |

 The devices meet the following standards 1992, electromagnetic emissions
 EN 50081-1: 1992, electromagnetic interference
 EN 50082-1: 1992, electromagnetic susceptibility

GLOSSARY

| Descriptions | References | Catalogue pages | Technical data pages |
|---|---|-----------------|----------------------|
| Cold mounting case | TOOL IFT SET 33 / Industry Fitting Tool Set | P 09 | P 36 |
| “Contact corrosion” anti-fretting paste | LUB MOUNTING PASTE (packaging) | P 11 | P 36 |
| Articulated manual pin spanner | TOOL PS (min. size – max. size) / Pin Spanner | P 11 | P 36 |
| Articulated manual hook spanner | TOOL HS (min. size – max. size) /Hook Spanner | P 11 | P 36 |
| Induction heater | TOOL SmartTEMP (size) / Induction Heater | P 14-16 | P 38 |
| Only bar for induction heater | TOOL ST/ (Size of the device) – YOKE (Bore diameter capacity) | P 14-16 | P 40 |
| Temperature probe for induction heater | TOOL TEMP PROBE (size) | P 14-16 | P 38-39 |
| Bar lifting device for heater | TOOL ST/ (capacity) LIFTING DEVICE | P 16 | P 39 |
| Bore puller kit with internal gripping | TOOL BP SET (min. size - max. size)/ Bore Puller | P 18 | P 41 |
| Deep-groove ball bearing puller kit | TOOL BBPS 10-100/ball bearing / Puller set | P 19 | P 42 |
| Self-centering mechanical puller | TOOL SCMP 2/3 - (max. reach) / Self-Center Mech Puller | P 20 | P 43 |
| Self-centering hydraulic puller | TOOL SCHP (capacity) TONS /Self-Center Hyd Puller | P 21 | P 43 |
| Accessories case for self-centering hydraulic puller | TOOL AS-SCHP (capacity) T / Acc. Set Hyd Puller | P 22 | P 44 |
| Tri-section pulling plate | TOOL BP3S (shaft min. / max.) / Tri-Section Back Puller | P 23 | P 44 |
| Mechanical spindle puller-separator Kit | TOOL BPES 10-105 / Back Puller extract set | P 24 | P 45 |
| Hydraulic puller for mounting and removal | TOOL PUSH/PULLER 8/12 Tons | P 25 | P 45 |
| ¼” gas ball valve | TOOL HMV BALL PLUG 1/4 | P 28 | P 46 |
| Set of O-rings for hydraulic nut | TOOL HMV (Size) / Piston Seals | P 28 | P 46 |
| Hydraulic nut with metric thread and piston return device | TOOL HMV (Size) EBF / Hydraulic Nut | P 28 | P 46-49 |
| Manual hydraulic pump kit | TOOL PUMP SET 700B (reservoir capacity) L / Pump with accessories | P 29 | P 50 |
| Oil for pump 700b | TOOL HYDRAULIC OIL 1L | P 29 | P 50 |
| Pump pressure gauge, 700 bars | TOOL PUMP GAUGE 700 | P 29 | P 51 |
| Quick coupling connection, ¼ gas (female) | TOOL PUMP COUPLING 1/4 | P 29 | P 51 |
| Pressure gauge adapter depending on pump | TOOL GAUGE ADAPTOR (reservoir capacity) | P 29 | P 51 |
| High-pressure hose with quick coupling connector (female) | TOOL HYDRAULIC HOSE (length mm) | P 29 | P 51 |
| Quick coupling connection, ¼ gas (male) | TOOL HMV NIPPLE ¼ | P 29 | P 51 |
| Thermal insulation gloves | TOOL GLOVE HEAT RESISTANT | P 32 | P 52 |
| Set of feeler gauges | TOOL FEELER GAUGES (length) | P 32 | P 52 |
| Infrared thermometer with laser sighting targeting ratio 30 : 1 | TOOL LASERTEMP 301 / IR Thermometer | P 33 | P 53 |



With our “field” experts, you boost the operational efficiency of

- By cutting your maintenance costs;
- By improving the quality of your work;
- By optimizing the service life of equipment.

The Bearing box proposes:

- Practical training
- Technical assistance
- Demonstration of maintenance product tools

Distributed by:

This document is the exclusive property of NTN-SNR ROULEMENTS. Any total or partial reproduction hereof without the prior consent of NTN-SNR ROULEMENTS is strictly prohibited. Legal action may be brought against anyone breaching the terms of this paragraph.

NTN-SNR ROULEMENTS shall not be held liable for any errors or omissions that may have crept into this document despite the care taken in drafting it. Due to our policy of continuous research and development, we reserve the right to make changes without notice to all or part of the products and specifications mentioned in this document.

© NTN-SNR ROULEMENTS, international copyright 2018.